A. I. A. FILE NO. 19-F

MAY 1955



THE WELDWOOD CATALOG

UNITED STATES PLYWOOD CORPORATION *world's largest plywood organization*

A. I. A. FILE NO. 19-F

FOREWORD

This catalog is your guide to the world's largest selection of high-quality plywood and allied products. It contains concise, factual descriptions, recommendations, sizes and approximate prices for every product in the WELDWOOD line. It will help the architect, builder, lumber dealer, industrial user and home owner to select and safely specify the right material for any building requirement.



Weldwood Guarantee

WELDWOOD interior-grade plywood is backed by this sweeping guarantee: "*Interior-Grade Weldwood is guaranteed by United States Plywood Corporation for the life of the building in which it is installed.*"

Exterior-grade WELDWOOD and the WELDWOOD Fire and "Stay-Strate" Door also carry unconditional guarantees.

You are invited . . .

to see WELDWOOD products on display at your nearest lumber dealer—or, at any of the United States Plywood Corporation branch offices listed on the back page of this catalog.

WELDWOOD products are also on display at these permanent exhibit showrooms:

WELDWOOD BUILDING
55 West 44th Street, New York City

ARCHITECTS' SAMPLES CORPORATION
101 Park Avenue, New York City

NATIONAL HOUSING CENTER
1028 Connecticut Avenue N.W.,
Washington, D.C.



Copyright 1955 United States Plywood Corporation



NEW PRODUCTS. Several new product developments are included in this catalog for the first time. These new products measure up to the exacting standards of quality and construction that are found in all WELDWOOD materials.

PLANKTEX, a decorative Philippine mahogany panel that combines a "grooved" textured stripe with the smooth grain pattern of the wood. (See page 11)

SAMARA, a genuine African hardwood panel available at budget prices. Also **NAKORA,** a low-cost Japanese hardwood with a highly figured grain pattern. (See page 29)

V-PLANK WELDWOOD, prefinished wood paneling that is v-grooved to create a vertical random plank effect. (See page 14)

KORINA PLANKWELD, this lovely, natural blonde wood has been added to the packaged line of "do-it-yourself" prefinished wall paneling. (See page 13)

DURAPLY, a fir plywood building panel with a permanently bonded, phenolic-resin "overlay" sheet that is completely weatherproof. (See page 4)

WELDROK, a strong, light-weight incombustible mineral core material developed for the WELDWOOD Fire and "Stay-Strate" Doors. (See page 40)

SEA SWIRL, a decorative paneling with an uneven textured face. (See page 12)

SURFPLANK, solid, abraded lumber plank-paneling that presents an interesting textured appearance. (See page 12)

AVAILABILITY. United States Plywood Corporation products are handled through our own distributing units located in all principal trading areas throughout the United States and Canada; also, by fully qualified distributors in Hawaii, Puerto Rico, and many foreign countries. This vast distribution organization is thoroughly equipped to supply an unusually wide assortment of plywood materials—promptly and efficiently. In addition, each office and warehouse is staffed with qualified "plywood engineers" to help you with any technical information that you desire. See complete listing of offices and warehouses on back cover.

IMPORTANT NOTES:

PRICES. All WELDWOOD prices listed in this catalog are approximate retail (list) prices per square foot and are subject to trade discount. Prices are subject to change without notice.

SIZES. The various woods, panel sizes and thicknesses that are listed may not be available from every warehouse. In most cases, however, they can be quickly obtained from nearby warehouses. If any other sizes besides those listed are needed, please contact your local WELDWOOD branch for information.

THE SHORTER THE PANEL, THE LOWER THE PRICE.
When ordering hardwood plywood, we suggest that you consider shorter panels of 5, 6 or 7 foot lengths. In many cases, they are just as suitable as the larger 8 foot panel and *cost less* per square foot.

INDEX

ADHESIVES ... 44
AIRCRAFT WELDWOOD ... 30
ALGOMA GRADE WELDWOOD ... 16-22
ARCHITECTURAL WELDWOOD ... 26
ARMORPLY ... 34
ARMORPLY, FORMING GRADE ... 35
BASSWOOD ... 30
BENDING PANELS ... 30
BIRCH ... 17
BIRCH, SPECIAL LOW COST ... 29
CEDAR, AROMATIC ... 7
CEDAR, KNOTTY ... 7
CHALKBOARD ... 34
CHECKERBOARD PANELS ... 15
CHERRY ... 23
CONCRETE FORM, FIR ... 4
CONTACT CEMENT, WELDWOOD ... 44
CORE STOCK, WELDWOOD ... 39
COUNTERFRONTS ... 27
CUPBOARD DOOR STOCK, BIRCH ... 17
CUT-TO-SIZE PLYWOOD ... 4
DIE-BOARDS ... 30
DOORS, FIR AND PINE ... 41
DOORS, FIRE ... 40
DOORS, FLUSH ... 40
DOORS, LUMBER CORE ... 41
DOORS, HOLLOW CORE ... 41
DOORS, SLIDING UNITS ... 42
DURAPLY ... 4
ELM, AMERICAN ... 22
EXTERIOR WELDWOOD ... 30
FIR, DOUGLAS ... 4
FIR, PLASTIC SURFACED ... 4
FIRE-RESISTANT PANELS ... 35
FIRZITE ... 44
FLEXWOOD ... 36
GLUE, USP RESORCINOL ... 44
GLUE, WELDWOOD ... 44
GLUE, WELDWOOD PRESTO-SET ... 44
GUM, QUARTERED FIGURED RED ... 22
GUM, SOUTHERN ... 28
GUM, UTILITY ... 28
HARDBOARDS ... 38
HARDBOARD, PERFORATED ... 39
HARDWOOD PANELS, PREFINISHED ... 15
KALISTRON ... 36
KORINA ... 19
LITERATURE LIST ... 47
LUMBER ... 39
MAHOGANY, AFRICAN ... 21
MAHOGANY, HONDURAS ... 21
MAHOGANY, PHILIPPINE ... 23
MAPLE ... 16
MARINE WELDWOOD ... 30
MERCHANDISING AIDS ... 46
MICARTA ... 32
MICARTABORD ... 33
MICARTA DELUXE UNITOP ... 33
MOLDINGS, WELDWOOD ... 35
NAKORA ... 29
NOVOPLY ... 8
OAK ... 18
PARTITION PANELS ... 42
PARTITIONS, MOVABLE ... 43
PEW SEATS ... 35
PINE, CALIFORNIA ... 6
PINE, KNOTTY ... 6
PLANKTEX ... 11
PLANKWELD ... 13
PLYBASE ... 4
PLYFORM ... 4
PLYPANEL ... 4
PLYSCORD SHEATHING ... 4
POPLAR ... 29
PORC-LIN-PLY ... 34
PRIMA VERA ... 22
PROTEKWOOD ... 31
ROTARY LIMBA ... 29
SAMARA ... 29
SATINLAC ... 44
SEA SWIRL ... 12
SHEATHING, PLYSCORD ... 4
SIDING, WELDTEX ... 10
SPRUCE, SITKA ... 7
SQUARES, WELDTEX ... 10
SURFPLANK ... 12
SURFWOOD ... 12
TEKWOOD ... 31
TEXTURE-ONE-ELEVEN ... 4
UTILITY TABLE TOPS ... 4
V-PLANK ... 14
WALNUT ... 20
WELDBORD ... 28
WELDROK ... 40
WELDTEX, INTERIOR AND EXTERIOR ... 10
WOOD FINISHING ... 44

Exclusive Weldwood feature WELDWOOD Fir Plywood in sheathing and interior plyform grades is now made with L-1R Resin . . . a highly mold-resistant bonding agent. This remarkable adhesive gives these panels almost all the advantages of exterior-type plywood yet sell at the interior grade price. They can, for example, be stored outdoors without protection for many months without danger of delamination.

Texture One-Eleven A new type exterior paneling with deep parallel grooves cut into the face to create a highly stylized siding material. Contains small knots and other natural wood characteristics. All plys are Douglas Fir veneer, bonded with 100% waterproof glue. The deep parallel grooves are spaced 2 or 4 inches apart, depending on the width of the panel. Splitproof and puncture-proof. Shiplap edges permit continuity of groove pattern, concealing joints. Can be applied quickly, easily. Also for soffits, porch ceilings, gable ends, carports, breezeways and fences. Thickness: 5/8". Widths: 16", 32" and 48". Lengths: 96" and 120".

Weldwood Duraply (resin overlaid panels). A low-cost, weather-resistant Douglas Fir building panel that is faced one or both sides with a special, phenolic-resin "overlay" sheet. For use as exterior siding, gable ends, soffits, outdoor signs, kitchen cabinets, boat decks and cabins, table tops and utility paneling. Its smooth, grainless surface takes paint exceptionally well; resists wear, acids and alkalis; is impervious to moisture vapor. Available in 3 and 5-ply thicknesses.

Weldwood Plybase (interior grade). Recommended as a base for linoleum, wall-to-wall carpeting and all kinds of floor material, as well as for backing for wall panel materials, and for remodeling work.

Weldwood Plypanel (interior grade). The many-purpose, "one side" material for interior uses such as wall and ceiling paneling, built-ins, wainscoting, backing and underlayment, counters, fixtures, displays, cut-outs. Made in sound-two-side grade (A-A), smooth sanded two sides, ready for finishing. Also made sound one side (A-D), sanded two sides; and sound one side with solid back (A-B), sanded two sides.

Weldwood Plyscord Sheathing (interior grade). This grade (C-D) meets every requirement for sheathing and subflooring. It is unsanded, low in cost but high in strength and rigidity. On construction jobs, its large size sheets permit economical erection. Panels 5/16" thick applied horizontally or vertically will provide 40% greater wall rigidity than diagonal bracing or sheathing.

Weldwood Plyform (L-1R and exterior). Both L-1R and exterior WELDWOOD plyform are used for the forming of concrete since they produce an excellent, smooth surface. *Exterior-type* Plyform is bonded with completely waterproof resin adhesives and should be specified where forms will be re-used repeatedly. Recommended in excessively humid areas, or under other extreme use or storage conditions. *L-1R (Interior) type* Plyform is highly water and mold resistant. L-1R Plyform with proper care and reasonable handling will yield multiple reuse. In most cases the glue line actually outlasts and outwears the wood itself.

Weldwood Exterior Fir The various grades of Fir WELDWOOD described above are available in Exterior type as well as Interior. The Exterior type is recommended for permanent outdoor service, including marine use. It utilizes phenol-formaldehyde resin as the bonding agent which is positive protection against ply-separations.

Marine Grade This grade is specifically engineered for the construction of boat hulls and other heavy duty marine applications where an absolutely water-tight material is required.

Utility Table Tops WELDWOOD Fir Plywood, 5′ x 9′ or 5′ x 4½′ (for a hinged table), is the perfect size for a utility table top, suitable for table tennis, electric trains and many other uses. Matching plywood leg sets also available.

Plastic-Surfaced Weldwood Fir Several types of plastic surfaced Fir WELDWOOD are available for many applications where a smooth, abrasion-resisting surface is needed.

FOR COMPLETE INFORMATION ON SPECIFIC TYPES OF FIR WELDWOOD, WRITE FOR INDIVIDUAL BULLETINS.

Weldwood Lebanex A new type of panel that combines the best features of Hardboard and Fir Plywood. Ideal for concrete forms, flooring, table tops, sliding doors, cabinets, etc. It is rigid, puncture-proof and split-proof.

Lebanex is of 5-ply construction. A center core of 3-ply Fir plywood is sandwiched between 1/8" Hardboard faces that are perfectly smooth. Its uniform density produces a tough surface that will resist wear and denting. Furnished in exterior and interior grades. All types of finish and finishing methods may be used.

Plywood Cut-to-Size We can now offer a new service on cut-to-size, specially fabricated, Fir plywood parts. Complete facilities for cutting to exact dimensions, shaping, boring, etc., are available. High efficiency and mechanical production enable us to quote extremely attractive prices on volume quantities. Please address all inquiries to your nearest WELDWOOD distributing unit.

softwoods

Douglas Fir



Douglas Fir Weldwood is an engineered material—fabricated in types, grades and sizes to meet all building and industrial requirements. All phases of its manufacture is a controlled, self-integrated WELDWOOD operation based on years of experience, employing the most modern machinery and methods. It is your assurance that Douglas Fir WELDWOOD is of top-notch quality.

There are two basic types of Douglas Fir: *Exterior and Interior*, with several grades within each type. The veneers used in the construction of these panels are designated and described as follows:

A—Quality veneer with highest standard appearance. No open defects. Smooth and paintable. Suitable for light stain-glaze finishes. Can be made of more than one piece, well joined and reasonably matched. Neat repair patches are permitted, as are shims, streaks and sapwood.

B—Similar to A veneer but permits circular plugs, edges of which may be slightly rough. Also permits sound, tight knots (up to 1"), tight splits and slightly rough grain.

C—Used for inner plys and backs (where designated). Permits knots (up to 1"), small borer holes, splits (3/16" or less), tight knots (up to 1½") and various repair patches. (In all grades of Exterior and in the Plyform grade of Interior, all inner plys are C veneer.)

D—Only for Interior grade panels. Permits knots to 2½", pitchpockets, limited splits, and repair patches.

Prices on request.

Grades of Interior Type Weldwood

GRADE TRADEMARKS	FACE	BACK	WIDTHS (INCHES)	LENGTHS (INCHES)	THICKNESSES (INCHES)
Interior A-A	A	D	30, 36, 48	60, 72, 84, 96, 120, 144	⅛, ¼, ⅜, ½, ⅝, ¾, 1, 1¼
Interior A-B	A	B	30, 36, 48	60, 72, 84, 96, 120, 144	⅛, ¼, ⅜, ½, ⅝, ¾, 1
Plypanel	A	D	30, 36, 48, 60	60, 72, 84, 96, 120, 144	⅛, ¼, ⅜, ½, ⅝, ¾, 1, 1¼
Plybase	C (Repaired)	D	30, 36, 48	60, 72, 84, 96, 120, 144	⅛, ¼, ⅜, ½, ⅝, ¾
Plyscord	C	D	24, 30, 36, 48	72, 84, 96, 108, 120	5/16, ⅜, ½, ⅝, ¾
L-1R (Interior) Plyform	B	B	48	96, 120	⅝, ¾

Grades of Exterior Type Weldwood

Ext-A-A	A	A	30, 36, 48	60, 72, 84, 96, 108, 120, 144, 168, 192	⅛, ¼, ⅜, ½, ⅝, ¾, ⅞, 1, 1⅛, 1 3/16, 1¼
Ext-A-B	A	B	30, 36, 48, 60	60, 72, 84, 96, 108, 120, 144, 168, 192	⅛, ¼, ⅜, ½, ⅝, ¾, ⅞, 1, 1⅛, 1 3/16, 1¼
Ext-Plyshield	A	C	30, 36, 48, 60	60, 72, 84, 96, 108, 120, 144, 168, 192	⅛, ¼, ⅜, ½, ⅝, ¾, ⅞, 1, 1⅛, 1 3/16, 1¼
Ext-Utility	B	C	30, 36, 48	60, 72, 84, 96, 108, 120, 144, 168, 192	⅛, ¼, ⅜, ½, ⅝, ¾, ⅞, 1, 1⅛, 1 3/16, 1¼
Ext-Sheathing	C	C	24, 36, 48	72, 84, 96, 108, 120	5/16, ⅜, ½, ⅝, ¾
Ext-Plyform	B	B	36, 48	72, 84, 96, 120	⅝, ¾

All grades are sanded both sides except Interior Plyscord and Ext-Sheathing, which are unsanded. ⅜" and thinner panels have a minimum of three plys; ½" to ¾" inclusive are 5-ply minimum; ⅞" and thicker are 7-ply minimum.

WELDWOOD Plywood Sheathing is easily, economically installed. Any type siding can be readily applied over it.

PLASTIC FACED FIR

(For plyform and durable use surfaces)

GOOD TWO SIDES

⅝"—5 ply 48" x 96"

¾"—5 ply 48" x 96"

WELDWOOD UTILITY TABLE TOPS (INTERIOR AND EXTERIOR)

⅝"—5 ply Widths 60"

¾"—5 ply Lengths 54" and 108"

LEBANEX

Tempered and Standard Grades (Interior and Exterior)

⅝" 48" x 96"

¾" 48" x 96"

DURAPLY

Thicknesses

5/16", ⅜", ½", ⅝" and ¾"

Panel Sizes

4' x 8', 4' x 9', 4' x 10'

This California Pine WELDWOOD kitchen has a charm and warmth not usually found in the ordinary "white" kitchen.

Knotty Pine

Made of the best white Idaho Pine, WELDWOOD Knotty Pine paneling has continued to be a popular choice of decorators and architects for walls of dens, libraries, playrooms, bars, etc.

Since it is now being manufactured in increased volume, the price is down to a modest level. The installed cost of WELDWOOD Knotty Pine now compares favorably to that of lumber. Its appearance, however, is far superior. Knotty Pine veneers are selected for the size and placement of knots. Shrinkage and waste, which are serious problems when narrow strips of lumber are used, are largely eliminated. Faces are specially selected to meet only the finest architectural requirements. This makes WELDWOOD Knotty Pine a wood paneling that can be relied upon to produce excellent decorative effects.

California Pine

Because it takes paint beautifully and is extremely easy to work, WELDWOOD California Pine has been the favorite of woodworkers for many years.

This fine, low-priced panel is *pine throughout* which means that it will behave perfectly and adapt itself to machining.

The "sound one side-solid back" grade of WELDWOOD California Pine is highly recommended for cupboard doors in the ¾" thickness, 5 or 7-ply construction. The 1 3/16" thickness is an ideal base for 1¼" tops surfaced with Micarta and other high-pressure laminates.

Available in both interior and exterior types.



Beautiful Knotty Pine WELDWOOD is a big favorite in playrooms and dens. This playroom installation shows walls, built-ins and furniture all made with WELDWOOD Knotty Pine panels.

Sitka Spruce



Sitka Spruce

Spruce WELDWOOD is genuine Sitka Spruce of the finest quality. It possesses unique features which have made it a top choice for boat building and numerous other applications.

Although it is about the same price as Douglas Fir, it is easier to paint or finish. In addition, there is less "checking" or grain raising. Spruce is also popular as a core panel for plastic laminates such as Micarta. Available in both interior and exterior grades.

Aromatic Cedar

Aromatic Cedar WELDWOOD is available from stock in ¼" thickness—3 ply construction. Characterized by a fresh wood fragrance, these panels are intended primarily for closet linings, chest linings, etc.

Knotty Cedar

Knotty Cedar WELDWOOD is now available in big 4' x 8' panels, ¼" and ¾" thick. These panels will add a charming, informal beauty to interiors of all types. Knotty Cedar is golden brown in color—with sound knots spaced at random on the panel face. Also for cabinet work, built-ins, etc.

CALIFORNIA PINE
(Interior)

PRICES ON REQUEST

Widths: 36" and 48"

Lengths: 72", 84", 96" and 120"

SOUND ONE SIDE SOLID BACK
SOUND ONE SIDE

- 1/4" 3 ply
- 3/8" 3 ply
- 1/2" 5 ply
- 5/8" 5 ply
- 3/4" 5 ply
- 3/4" 7 ply
- 1-3/16" 7 ply

GOOD ONE SIDE SOUND BACK
SOUND TWO SIDES

- 1/4" 3 ply
- 3/8" 3 ply
- 1/2" 5 ply
- 5/8" 5 ply
- 3/4" 5 ply
- 3/4" 7 ply
- 1-3/16" 7 ply

Exterior Pine available on Special Order.

KNOTTY PINE

GOOD TWO SIDES
GOOD ONE SIDE

1/4"–3 ply

48" x 72"	39	
48" x 84"	41	
48" x 96"	42	
96" x 48" *	42	

3/4"–7 ply

48" x 84"	72	
48" x 96"	75	.87
96" x 48" *	72	

Good one side, also available with reject Knotty Pine backs.

* Counterfronts.

SITKA SPRUCE

Sizes: 48" x 96" and 48" x 120"

PRICES ON REQUEST

- ¼"–3 ply
- ⅜"–3 ply
- ½"–5 ply
- ⅝"–5 ply
- ¾"–5 ply
- 1 3/16"–7 ply

AROMATIC CEDAR

1/4"–3 ply

48" x 72"	53
48" x 84"	56
48" x 96"	59

VERTICAL GRAIN FIR

PRICES ON REQUEST

1/4"–3 ply

- 48" x 72"
- 48" x 84"
- 48" x 96"

3/4"–7 ply

- 48" x 72"
- 48" x 84"
- 48" x 96"

KNOTTY CEDAR

GOOD ONE SIDE

1/4"

48" x 96" 35

3/4"

48" x 96" 65

Novoply is a unique, wood plastic product that is unlike anything you have seen. Its construction combines the plywood principle of lamination with the use of resin-impregnated wood chips and flakes resulting in a panel of unusual flatness. It is a 3-ply panel consisting of a 1/16″ surface of wood veneer flakes, a core of medium size chips, and another 1/16″ layer of wood flakes. The plies are simultaneously formed and fused together under extreme heat and pressure.

OUTSTANDING FEATURES

- a gleaming, mosaic-textured surface that may be left natural, stained or painted
- good 2-sides panel, with no patches or plugs, no danger of grain raise
- amazingly flat, practically warp-free, dimensionally stable
- medium in weight and easy to work, NOVOPLY can be fabricated with ordinary tools or high-speed power machines . . . holds nails and screws firmly without splitting
- possesses better heat insulating qualities than either wood or plywood

NOVOPLY offers unlimited uses. Because of its beauty and flatness, it is ideal for furniture, cabinets, and built-ins of all kinds. It can be used for wall paneling, wall partitions, or for sliding doors on wardrobes and cabinets. (See page 12.)
NOVOPLY may be readily finished by using standard wood finishing procedures. It is available with faces of either Pine or California Redwood.




This desk was fabricated with Redwood and Pine Novoply for decorative color contrast.



Outstanding styling is achieved in this office lobby by combining Pine Novoply with wedge-shaped Pine moldings.



Novoply is the ideal core material for Micarta sink and counter top installations.

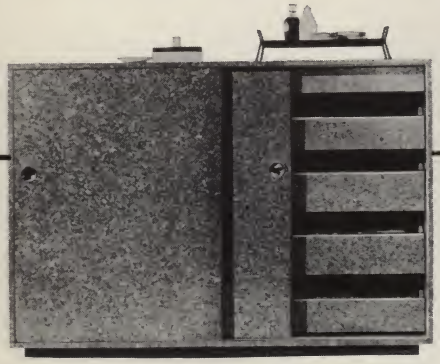


This roomy "Mr. and Mrs." wardrobe is made from warm Redwood Novoply.

Novoply as a core material

Because of its remarkable stability and moderate cost, NOVOPLY is the perfect core material for hardwood veneers, decorative Micarta and other plastic covering materials. NOVOPLY means extra economy in construction because it requires no cross-banding. Specific veneering instructions will be furnished on request. Special prices for NOVOPLY core stock may be obtained from any United States Plywood branch.

for the complete story, write for the new novoply brochure.

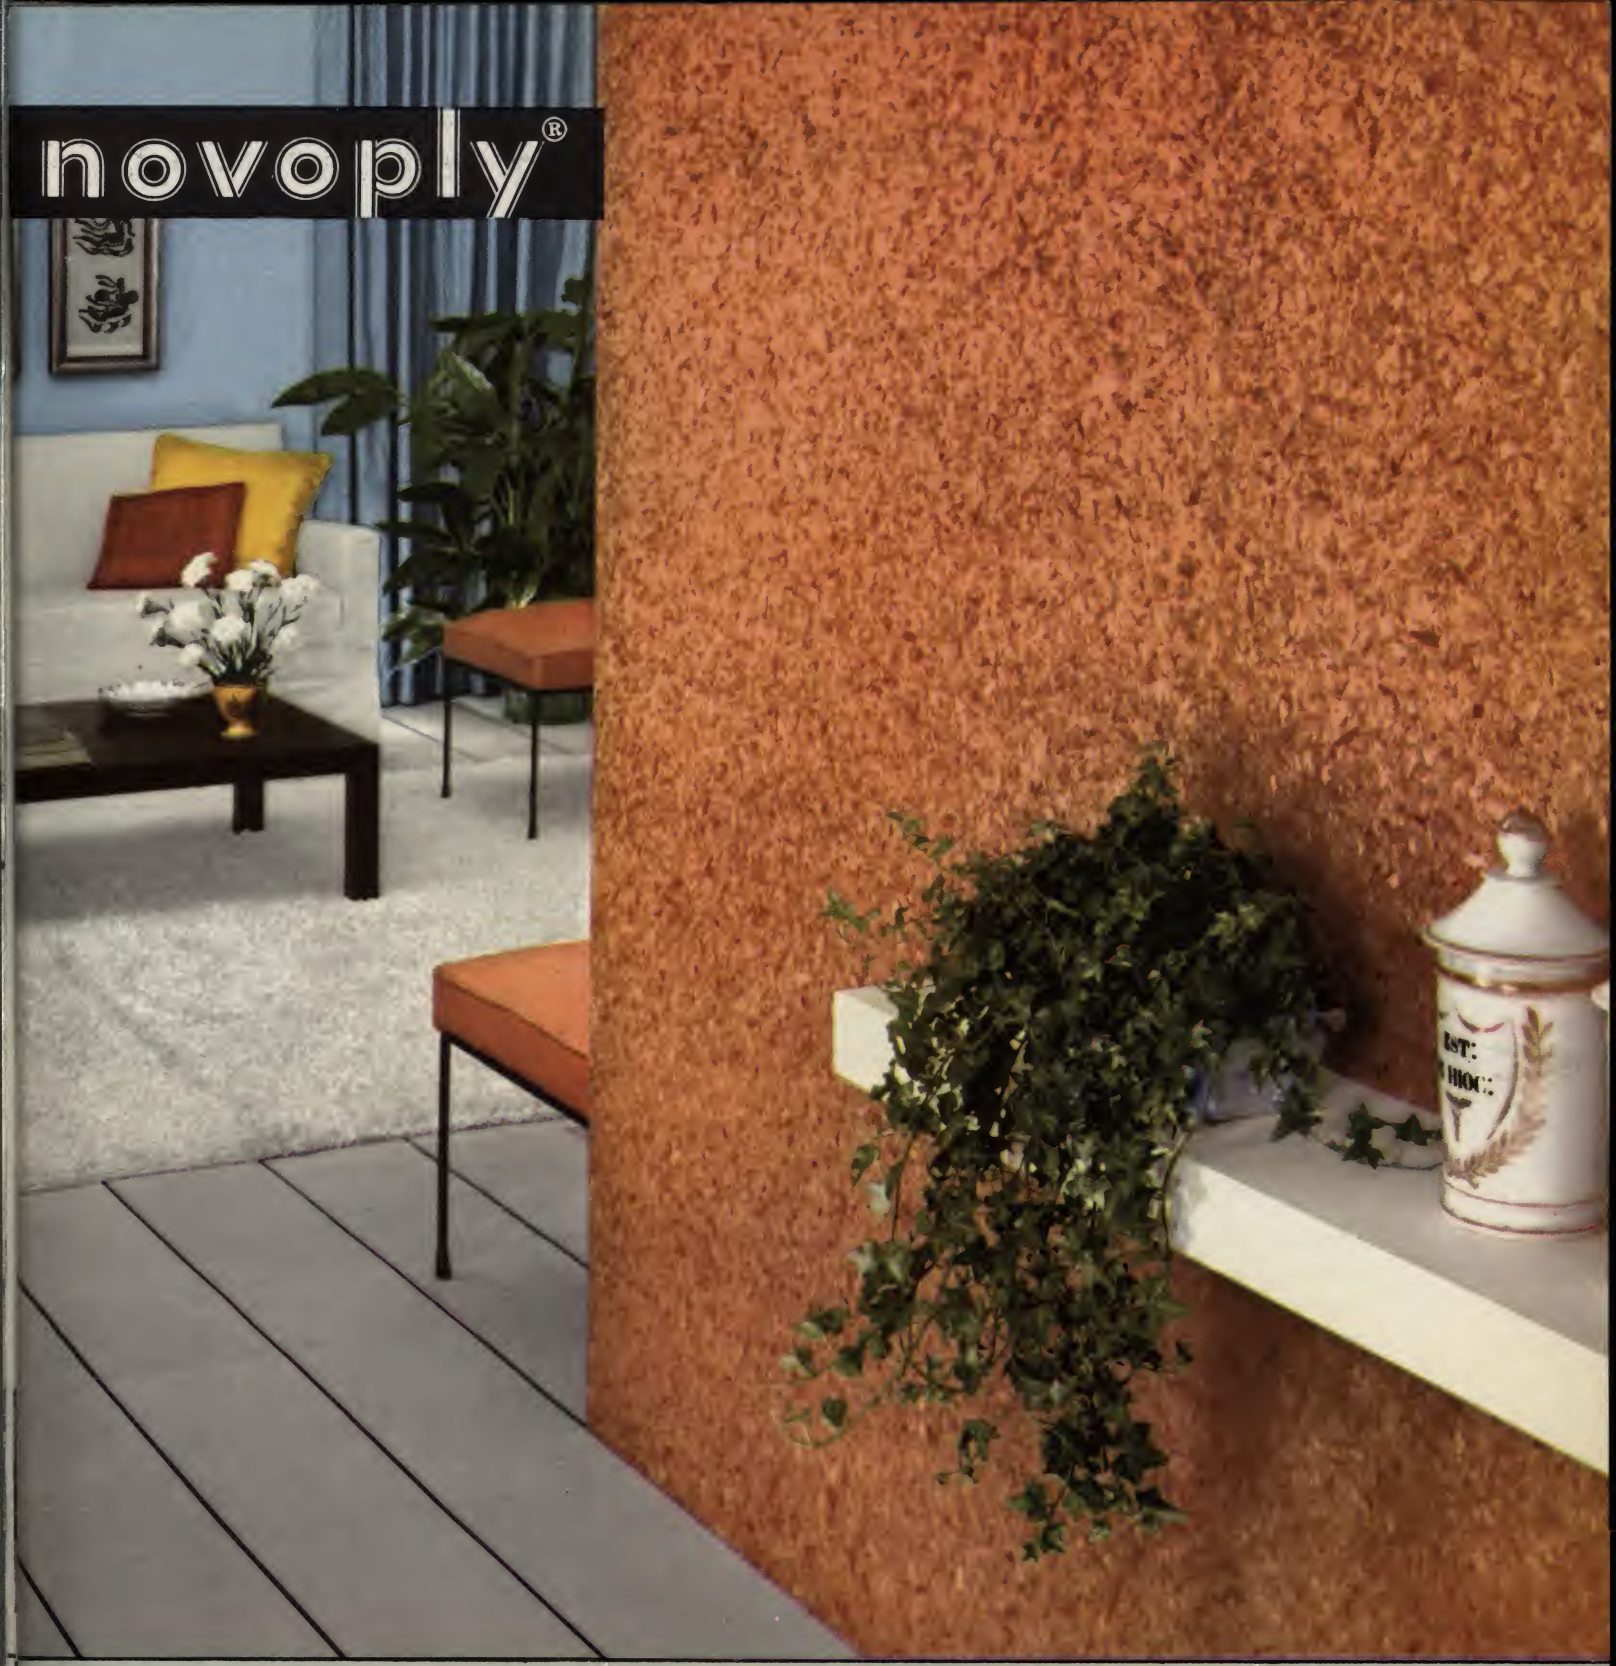

NOVOPLY PINE

GOOD TWO SIDES

3/8"	48" x 96" 29	**3/4"** (cont.)	
1/2"	48" x 96" 34	30" x 72"	.40
3/4"	30" x 48" 40	36" x 72"	.40
	30" x 60" 40	48" x 72"	.40
	36" x 60" 40	30" x 96"	.40
	12" x 72" 40	36" x 96"	.40
	18" x 72" 40	48" x 96"	.40
	24" x 72" 40	30" x 120"	.40
		48" x 120"	.40

1" 48" x 96" 52

Novoply in ¾" thickness is also available in a wide range of sizes for special applications—door sizes for sliding doors, dinette top sizes as core material under Micarta and other plastic laminates—other small sizes for furniture, for built-ins and for other uses—consult your nearest United States Plywood Corporation branch for sizes available. Prices of smaller sizes are always lower than for larger stock panels. Novoply is available in special cut-to-order sizes for large volume purchasers. Prices on request, based on size and quantity requirements.

CALIFORNIA REDWOOD NOVOPLY

GOOD TWO SIDES

3/8"

48" x 96" 35

3/4"

48" x 96" 45

WELDTEX is the original striated plywood that creates entirely new effects for walls of homes and offices, for building exteriors, for displays, signs, furniture and countless paneling and decorating installations.

Deep grooves or striations are cut into the natural wood surface of WELDTEX giving an interesting textured finish of parallel, random-width lines running the length of each panel. These cut-in grooves break up the flat surface and create unusual high-lights and shadows. They also permit butt joints without a visible joint line and conceal face nails. There is no grain raising or "checking." Since the striations relieve surface tension, the expansion and contraction of the wood is kept to a minimum.

specialty wall panels...

Weldtex

WELDTEX fits any decorative scheme—modern or traditional. It adapts itself to interesting layouts such as horizontal and vertical stripe, checkerboard, diamond, or herringbone patterns.

Made in both interior and exterior grades, WELDTEX is available with veneers of Douglas Fir, Southern Gum, Philippine Mahogany. It takes all types of finishes and is surprisingly economical to install.

WELDTEX SQUARES. Accurately cut WELDTEX squares are furnished in Southern Gum, in either pink, white or unselected for color as well as Douglas Fir and Philippine Mahogany. These squares make it easy to achieve that popular "checkered" effect on walls and ceilings. They are 5/16" thick and come in 11⅞", 12", 15⅞", 16" and 24" squares—conveniently packed in easy-to-handle cartons.

WELDTEX SIDING is made of Douglas Fir WELDTEX in exterior grade. It is cut into wide panels, 48" x 15⅞", and packed in bundles of 22 panels each.

This is a modern and economical siding material that offers substantial savings in labor costs. It produces a weather-tight installation with a minimum of seams and takes any exterior finish perfectly. Approved by FHA on Federal Housing jobs.

EXTERIOR WELDTEX. The exterior grade of WELDTEX is made of Douglas Fir and bonded with phenolic resin waterproof adhesives. The striations prevent "checking" which makes it the safest type of plywood for outdoor use. Ideal for exteriors of homes, stores, commercial buildings, motels, etc. It may be painted or stained to fit any color scheme and harmonizes easily with any architectural design. Exterior WELDTEX may be used without sheathing as exterior siding in home construction—an application which results in substantial economies to the builder without sacrificing either the strength or weather-tightness of the house.



FIR WELDTEX
(Interior)

5/16"–3 ply
SOUND ONE SIDE

11⅞" x 11⅞"	$.29
12" x 12"	.29
15⅞" x 15⅞"	.29
16" x 16"	.29
24" x 24"	.29
48" x 48"	.29
48" x 72"	.29

(continued)

FIR WELDTEX
(Interior)

5/16"–3 ply
SOUND ONE SIDE

48" x 84"	$.29
48" x 96"	.29
48" x 108"	.30
48" x 120"	.32

3/4"–7 ply

48" x 96"	.53

FIR WELDTEX
(Exterior)

3/8"–3 ply

48" x 84"	$.33
48" x 96"	.33
48" x 120"	.36

FIR WELDTEX SIDING
(Exterior)
Packaged 22 pieces to a bundle.

3/8"–3 ply
SOUND ONE SIDE

48" x 15⅞"	$.33



PLANKTEX panels provide an entirely new approach in today's trend toward unusual *textured* interiors. Made of lovely Philippine Mahogany, these big-size panels have 6-inch bands of irregularly-cut "grooves" or striations alternating with the smooth grain pattern of the wood. This "stripe" pattern achieves a plank effect that will add a neat textured look in both residential and commercial interior installations.

PLANKTEX is an inexpensive wall paneling material, too! Its low initial cost *plus* the fact that it requires little or no maintenance makes it the ideal paneling for low-budget remodeling projects—as well as new building construction. It is available unfinished—or with a fine factory-applied finish, ready to install. By using Weldwood Contact Cement (see page 44), Planktex can be permanently glued to studs or furring—without using nails of any kind. Weldwood Mahogany Moldings (see page 35) that match the faces of Planktex panels are available for installation at corners and joints.

Furnished in big 4′ x 8′ panel sizes, 5/16″ thick.

PHILIPPINE MAHOGANY WELDTEX (Interior)

5/16″—3 ply

48″ x 96″	$.33

UNSELECT GUM WELDTEX (Interior)

5/16″—3 ply

12″ x 12″	$.33
16″ x 16″	.33
24″ x 24″	.33
48″ x 48″	.33
48″ x 72″	.29
48″ x 84″	.29
48″ x 96″	.29

SELECT GUM WELDTEX (Interior)

5/16″—3 ply

SOUND ONE SIDE

12″ x 12″	$.41
16″ x 16″	.41
24″ x 24″	.41
48″ x 48″	.41
48″ x 84″	.33
48″ x 96″	.33

PLANKTEX (Unfinished)

5/16″

48″ x 96″	$.33

(Prefinished)

48″ x 96″	.50



SEA SWIRL is a low-cost decorative panel with an authentic rustic appearance. The panel face is 3-dimensional, the grain standing out in relief from the etched-out background. Made of superior grades of Douglas Fir plywood, Sea Swirl is free of knots and the face veneers are carefully selected for matching color and grain. The uneven texture helps to conceal nail heads during installation. Ideal for remodeling or new construction—such as walls, ceilings, built-ins, furniture, etc. May be finished in many rich, natural colors. Also dry pigment can be worked into the face for duotone shading.

SURFWOOD is similar to Sea Swirl and also presents an interesting textured appearance. However, the face of this paneling includes open and sound knots which add greatly to the natural appearance of the panel. Made of white Fir plywood, Surfwood is priced right for low-budget building jobs.

SURFPLANK is solid lumber paneling that has the textured appearance of Surfwood. These abraded plank boards come in 6″, 8″ and 10″ widths and are $\frac{5}{8}$″ thick (*rough*). Long edges are shiplapped so no special vertical joint treatment is needed. Available in all popular lengths. Packed in bundles with uniform widths and random lengths. Price is 27¢ per sq. ft.

SEA SWIRL 5/16″

48″ x 96″.....$.34 (squares) 16″ x 16″.....$.36 24″ x 24″.....$.36

SURFWOOD 5/16″

48″ x 96″.....$.25 (squares) 15⅞″ x 15⅞″.....$.27



Plankweld

The wood-paneled room that comes in a package.

PLANKWELD is pre-finished WELDWOOD plywood that anyone can install—quickly and easily. It may be installed, without furring, over old walls or over bare studs in new construction. It is a packaged lumber dealer item that is made to order for the "home handyman."

Each PLANKWELD panel is edge-grooved to provide a neat lap joint. Specially designed metal clips are furnished which hold these panels firmly to the wall. The clips are completely hidden and eliminate nailing through the face of the wood.

PLANKWELD needs no finishing. It is prefinished at the factory and is available in the beautifully grained woods listed below.



PLANKWELD

Birch

GOOD ONE SIDE

1/4"–3 ply

16¼" x 72"	$.63
16¼" x 84"	.63
16¼" x 96"	.63
16¼" x 108"	.83
16¼" x 120"	.89

Korina

1/4"–3 ply

16¼" x 72"	.78
16¼" x 84"	.78
16¼" x 96"	.78
16¼" x 108"	1.00
16¼" x 120"	1.07

Honduras Mahogany

1/4"–3 ply

16¼" x 72"	.72
16¼" x 84"	.72
16¼" x 96"	.72

Philippine Mahogany

1/4"–3 ply

16¼" x 72"	.63
16¼" x 84"	.63
16¼" x 96"	.63

Plain Sliced Oak

1/4"–3 ply

16¼" x 72"	$.72
16¼" x 84"	.72
16¼" x 96"	.72
16¼" x 108"	1.00
16¼" x 120"	1.07

Walnut

1/4"–3 ply

16¼" x 72"	$.78
16¼" x 84"	.78
16¼" x 96"	.78
16¼" x 108"	1.20
16¼" x 120"	1.27

Knotty Pine

1/4"–3 ply

16¼" x 84"	.63
16¼" x 96"	.63

PLANKWELD INSTALLATION DATA

Made of 3-ply, ¼" plywood, PLANKWELD panels are available in 6', 7' and 8' lengths (some woods are also available in 9' and 10' lengths). Each panel is 16¼" wide. They come in a package containing either ten panels or a package containing nine panels and a tenth panel which has been precut into two shorter lengths. This is for your convenience in fitting around doors, windows and built-ins. Metal clips for fastening and complete installation instructions are included.

An oak Plankweld installation in one of the waiting rooms at Lankenau Hospital, Philadelphia. *Architect:* Vincent G. Kling.



V-Plank Weldwood



V-Plank Weldwood is *prefinished* wall paneling that is "v-grooved" to create an interesting random plank effect. These shallow, v-shaped grooves are cut vertically into the face of this paneling to emphasize the natural tone and texture of the wood and to add a neat, line-shadow accent. Ideal for living rooms, dining areas, halls, bedrooms, dens, game rooms, etc.

V-Plank WELDWOOD is beautifully prefinished at the factory. This is expert wood finishing at its very best, too! Full accuracy of color and grain is carefully developed in each panel by "old-school" wood craftsmen. The perfect satin-smooth finish is unlike any other prefinished panel.

V-Plank WELDWOOD is easy to install over any wall. It goes up fast and covers a larger wall area than regular, narrow-width plank board. This saves on installation costs—cuts job-time in half. The panel edges are v-grooved to permit perfect jointing—and to hide all nails. This paneling can be cemented to studs or furring with Weldwood Contact Cement, too. (See page 44.)

Furnished in large, rigid 4′ x 8′ panels, ¼″ thick in the following woods: walnut, oak, Korina, Honduras mahogany and Samara. (V-Plank may also be obtained *unfinished*.)

"Colonial" V-Plank is a special "pegged" wall paneling that gives the appearance of lumber plank. Comes in big 4′ x 8′ panels, ¼″ thick, that will cover a larger wall area much faster than regular lumber plank. Available in Honduras mahogany only.

PREFINISHED V-PLANK
(Samara)

1/4″

48″ x 96″ $.51

1/4″
(All Other Woods)

48″ x 96″ 78

"COLONIAL"
PREFINISHED V-PLANK

1/4″

48″ x 96″ 78

(Unfinished—.48)

prefinished hardwood panels



Prefinished walnut WELDWOOD paneling provides the perfect background for traditional or modern accessories.

WELDWOOD hardwood panels are available with a *permanent factory finish* in the following woods: oak, walnut, Samara, Korina and Honduras mahogany.
Each wood panel is beautifully prefinished. It is not a standard production-line finishing job. This is expert cabinet-type finishing at its very best. After years of experiment with all types of finishing techniques, WELDWOOD has developed the perfect finishing procedure for volume production of prefinished-type panels.
As yet, no one has been able to match it.

All WELDWOOD Prefinished hardwood paneling is packaged in a protective container of 4 panels each.
They are ready to install. Matching lacquer sticks are included to use in concealing nail holes during installation.
Instead of nailing these panels to furring or studs, they may be glued in place with the remarkable WELDWOOD CONTACT CEMENT (see page 44). This contact adhesive is a ready-mixed bonding liquid that permits panel installation without using nails of any kind. *All prefinished woods come in 4′ x 8′ panels, ¼″ thick.*

PREFINISHED PANELS

(Walnut, Korina, Oak and Mahogany)

1/4″

32″ x 96″ $.78
48″ x 96″ 78

(Samara)

1/4″

32″ x 96″ $.47
48″ x 96″ 47

CHECKERBOARD PANELS

Good One Side

1/4″

48″ x 96″ 80

(Korina, Mahogany, Rift Oak, Walnut)

Checkerboard Panels



These WELDWOOD panels provide a practical and economical way to install a startling checkerboard pattern on walls and ceilings—without cutting and fitting many small pieces.
They will produce unusual decorative effects in homes and offices—and have unlimited possibilities in commercial and industrial construction.
Each large-size panel consists of a number of 16″ squares of selected hardwood veneers set at right angles to each other on a sturdy plywood base—5 ply construction. Light in weight, WELDWOOD CHECKERBOARD paneling goes up quickly in new construction or in covering old walls and ceilings.
Furnished in rift oak, sliced walnut, Korina and African ribbon-striped mahogany. Panel size, 48″ x 96″, ¼″ thick. Every panel is smoothly sanded and is ready for finishing.

Maple



A Birch WELDWOOD installation in the home of Mr. & Mrs. George Montgomery of Pattonsburg, Missouri.

ALGOMA QUALITY At Algoma, Wisconsin, the WELDWOOD plant employs the most modern machinery and methods in producing Algoma-Grade plywood on a straight-line production basis. Only the finest veneers are selected for the construction of Algoma-grade panels. The veneers used are of uniform color, expertly center matched and free of even minor defects. Algoma-grade WELDWOOD has continuously enjoyed the reputation of being the finest type of hardwood plywood available.

In addition, Algoma-grade plywoods, such as walnut, Korina, oak and mahogany are available sequenced-matched for perfect installations. Also fire-resistant plywood panels can be furnished in the Algoma-grade, too. (See page 35.)

Maple

Only "rock maple," an exceptionally hard wood found in Northern regions, is used for maple WELDWOOD. The sapwood of this maple is light but the heartwood has a somewhat darker shade. When a maple paneling job is to be stained, panels unselected for color may be employed. However, selected white maple must be used if modern light or blonde finishes are desired. It must also be used where a uniform white color is essential.

SELECT WHITE MAPLE—Select white maple WELDWOOD is faced entirely with selected veneers which are uniform in color and free of stain or mineral streak.

BIRD'S-EYE MAPLE—Bird's-eye maple is a freak of nature. The value of the veneer depends on the quantity and distribution of "bird's-eyes" on the faces. WELDWOOD panels are made with the finest of these veneers. They are thoroughly covered with figure and and are selected for even, light color.

CURLY MAPLE—A favorite during Colonial times, Curly maple is still the choice of fine furniture craftsmen. Selected from choice logs, the "crossfire" figure of this wood lends tone and distinction to any installation. Curly maple WELDWOOD has this distinctive graining and it is perfectly balanced.

SELECT WHITE MAPLE

GOOD TWO SIDES →
GOOD ONE SIDE →

1/4"–3 ply

36" x 72"	.58	
36" x 84"	.62	
36" x 96"	.65	
48" x 72"	.58	.95
48" x 84"	.62	
48" x 96"	.65	1.07

3/8"–5 ply

48" x 72"	.79
48" x 84"	.83
48" x 96"	.86

3/4"–5 ply Lumber Core

36" x 72"	1.19	
36" x 84"	1.22	
36" x 96"	1.26	
48" x 72"	1.19	1.59
48" x 84"	1.22	
48" x 96"	1.26	1.70
144" x 36" (C'f'ts)	1.15	
144" x 42" (C'f'ts)	1.15	
144" x 48" (C'f'ts)	1.15	

BIRCH

1/8"–3 ply

36" x 72"	$.38
36" x 84"	.41
36" x 96"	.47
48" x 72"	.38
48" x 84"	.41
48" x 96"	.47
72" x 48" (C'f'ts)	.36

1/4"–3 ply

36" x 48"	.38	
36" x 60"	.38	
36" x 72"	.40	
36" x 84"	.43	
36" x 96"	.49	
48" x 48"	.38	
48" x 60"	.38	
48" x 72"	.40	$.55
48" x 84"	.43	.60
48" x 96"	.49	.68
48" x 108"	.57	
48" x 120"	.64	

3/8"–5 ply

36" x 72"	.61	
36" x 84"	.64	
48" x 60"	.59	
48" x 72"	.61	
48" x 84"	.64	.81
48" x 96"	.70	.89

1/2"–5 ply

36" x 84"	.73
48" x 72"	.67
48" x 84"	.70
48" x 96"	.76

Birch

Birch WELDWOOD is a fine hard cabinet wood which can be worked beautifully and lends itself to brilliant finishes. It can be painted, enameled or stained to the color of walnut or mahogany. The veneers are cut on the most modern equipment and segregated into all white, all red and natural. Birch WELDWOOD, in either selected red or white color is suited for the finest cabinet work where a uniform color is desired. Natural birch is an ideal panel for staining or it may be painted when a perfect finish and a smooth, hard base are desired.
Birch panels are available with various cores: Novoply, lumber and veneer.

SELECTED WHITE OR RED BIRCH—The segregation of white and red birch panels is carefully done at our Algoma, Wisconsin plant and we are usually able to offer an assortment of sizes in either color.

CURLY BIRCH—Curly Birch WELDWOOD panels have an attractive wavy figure which makes this wood highly desirable for cabinet work.

BIRCH CUPBOARD DOOR STOCK—Door stock made with a fir core and faced both sides with Birch is available in 5 and 7-ply construction. This door material will stay straight and can be painted, stained or finished natural. WELDWOOD's birch-faced door stock is also furnished with a Novoply core and edge-banded on the two long sides with solid basswood. Birch cupboard door stock is also available with a solid basswood lumber core in 5-ply construction.

BIRCH (cont.)

3/4"–5 ply Novoply Core

30" x 84"	$.77
36" x 72"	.76
36" x 84"	.77
48" x 72"	.74
48" x 84"	.77
48" x 96"	.83
72" x 36" (C'f'ts)	.77
72" x 48" (C'f'ts)	.77
144" x 36" (C'f'ts)	.83
144" x 42" (C'f'ts)	.83
144" x 48" (C'f'ts)	.83

3/4"–7 ply Veneer Core

36" x 72"	.74
48" x 48"	.68
48" x 60"	.71
48" x 72"	.74
48" x 84"	.77
48" x 96"	.80
96" x 36" (C'f'ts)	.77
96" x 42" (C'f'ts)	.77
96" x 48" (C'f'ts)	.77
120" x 36" (C'f'ts)	.86
120" x 42" (C'f'ts)	.86
120" x 48" (C'f'ts)	.86

Some sizes available in Good Two Sides or Good One Side, Sound Back. Prices on Request.

BIRCH (cont.)

3/4"–5 ply Lumber Core

36" x 72"	1.01	
36" x 84"	1.04	
36" x 96"	1.09	
48" x 60"	.99	
48" x 72"	1.01	1.19
48" x 84"	1.04	1.24
48" x 96"	1.09	1.32
48" x 120"	1.24	
144" x 28" (C'f'ts)	1.02	
144" x 36" (C'f'ts)	1.02	
144" x 42" (C'f'ts)	1.02	
144" x 48" (C'f'ts)	1.02	

SELECT WHITE BIRCH

1/4"–3 ply

48" x 72"	.50
48" x 84"	.53
48" x 96"	.57

3/8"–5 ply

48" x 96"	.78

1/2"–5 ply

48" x 96"	.87

3/4"–7 ply Veneer Core

48" x 72"	.98
48" x 84"	1.01
48" x 96"	1.04

SELECT WHITE BIRCH (continued)

3/4"–5 ply Lumber Core

48" x 72"	1.11	
48" x 84"	1.14	
48" x 96"	1.19	1.52
144" x 28" (C'f'ts)	1.12	
144" x 36" (C'f'ts)	1.12	
144" x 42" (C'f'ts)	1.12	
144" x 48" (C'f'ts)	1.12	

SELECT RED BIRCH

1/4"–3 ply

48" x 72"	.50
48" x 84"	.53
48" x 96"	.57

3/4"–7 ply Veneer Core

48" x 96"	1.04

3/4"–5 ply Lumber Core

48" x 96"	1.14

CURLY BIRCH

PRICES ON REQUEST

1/4"–3 ply

48" x 72"
48" x 84"
48" x 96"

3/4"–5 ply Lumber Core

48" x 96"

BIRCH CUPBOARD DOOR STOCK

PRICES ON REQUEST

5 ply Novoply Core

Banded on two long edges with 1½" Basswood
Widths: 12", 14", 16", 18", 20", 22", 24", 26", 28", 30".
Lengths: 72", 84".
Grades: Good One Side with Sound Back, Good Two Sides.

Lumber Core

Widths: 12", 14", 16", 18", 20", 22", 24", 26", 28".
Lengths: 60", 72", 84".

BIRCH BENDING PANELS

1/8–3 ply

48" x 72"	.41
48" x 84"	.47
48" x 96"	.51
72" x 48" *	.42

* Counterfronts

oak

WELDWOOD oak plywood is expertly made from only the finest commercially-cut logs in the country. It is a genuine oak with a lovely mellow color. The veneers are sliced rather than rotary-cut to achieve the maximum beauty of the grain and pattern. These panels are made with either Novoply, lumber or veneer cores.

PLAIN SLICED OAK WELDWOOD plain sliced oak is manufactured from the same quality of logs used for comb grain or rift. Therefore, the panels are clean, have uniform color, and are suitable for quality cabinet and fixture work.

RIFT (COMB GRAIN) **WHITE OAK** By slicing the oak flitch on an angle (rift slicing), a straight or comb grain effect is produced. WELDWOOD rift white oak is selected for uniform texture and figure and lends itself admirably to the "blond finishes" used in modern fixture and cabinet work. Panels are center matched.

PLAIN RED OAK (ROTARY CUT) Freedom from sap stain or mineral streak is an important feature of these WELDWOOD cabinet grade oak panels. They are lower-priced and lend themselves to the better type of cabinet job. All panels are center matched.

Beautifully grained Red Oak WELDWOOD forms a 7-foot-high wall in the Midland School, Rye, New York. *Architects:* Emilio Di Rienzo and Warren S. Holmes Co.



OAK, PLAIN SLICED

GOOD TWO SIDES ↓
GOOD ONE SIDE ↓

1/8"–3 ply

48" x 96"	.59	

1/4"–3 ply

36" x 60"	.51	
36" x 72"	.55	
36" x 84"	.59	
36" x 96"	.62	
48" x 60"	.51	
48" x 72"	.55	
48" x 84"	.59	
48" x 96"	.62	.98
48" x 120"	.77	

3/8"–5 ply

48" x 72"	.76	
48" x 84"	.80	
48" x 96"	.83	1.19

1/2"–5 ply

48" x 96"	.92	

NOVOPLY-CORE

3/4"–5 ply

48" x 72"	.91	
48" x 84"	.95	
48" x 96"	.98	

3/4"–7 ply Veneer Core

48" x 60"		
48" x 72"	.96	
48" x 84"	1.00	
48" x 96"	1.03	1.20
96" x 48" *	1.00	

3/4"–5 ply Lumber Core

36" x 72"	1.16	
36" x 84"	1.20	
36" x 96"	1.23	
48" x 48"	1.09	
48" x 60"	1.13	
48" x 72"	1.16	
48" x 84"	1.20	
48" x 96"	1.23	1.60
48" x 120"	1.38	
144" x 28" *	1.14	
144" x 36" *	1.14	
144" x 42" *	1.14	
144" x 48" *	1.14	

OAK, RIFT WHITE (Comb Grain)

1/8"–3 ply

36" x 84"	.70	
36" x 96"	.73	
48" x 72"	.66	
48" x 84"	.70	
48" x 96"	.73	

1/4"–3 ply

24" x 84"	.72	
30" x 84"	.72	
30" x 96"	.75	
36" x 48"	.65	
36" x 60"	.66	
36" x 72"	.68	
36" x 84"	.72	
36" x 96"	.75	
48" x 48"	.65	
48" x 60"	.66	
48" x 72"	.68	1.16
48" x 84"	.72	1.25
48" x 96"	.75	1.32
48" x 108"	.84	
48" x 120"	.90	

* Counterfronts

GOOD TWO SIDES ↓
GOOD ONE SIDE ↓

3/8"–5 ply

36" x 72"	.89	
36" x 84"	.93	
48" x 72"	.89	
48" x 84"	.93	
48" x 96"	.96	1.53

1/2"–5 ply

36" x 72"	.96	
48" x 72"	.98	
48" x 84"	.99	
48" x 96"	1.02	

NOVOPLY-CORE

3/4"–5 ply

30" x 84"	1.07	
36" x 72"	1.04	
48" x 72"	1.04	
48" x 84"	1.07	
48" x 96"	1.11	
72" x 36" *	1.07	
72" x 48" *	1.07	
144" x 36" *	1.17	
144" x 42" *	1.17	
144" x 48" *	1.17	

3/4"–7 ply Veneer Core

48" x 60"	1.06	
48" x 72"	1.09	
48" x 84"	1.13	1.67
48" x 96"	1.16	1.74
96" x 48" *	1.11	
120" x 36" *	1.13	
120" x 42" *	1.13	
120" x 48" *	1.13	

3/4"–5 ply Lumber Core

36" x 60"	1.28	
36" x 72"	1.30	
36" x 84"	1.34	
36" x 96"	1.37	
48" x 48"	1.26	
48" x 60"	1.28	
48" x 72"	1.30	1.81
48" x 84"	1.34	1.89
48" x 96"	1.37	1.97
48" x 120"	1.52	
144" x 28" *	1.25	
144" x 36" *	1.25	
144" x 42" *	1.25	
144" x 48" *	1.25	

OAK, ROTARY RED

1/4"–3 ply

48" x 72"	.40	
48" x 84"	.43	
48" x 96"	.47	

3/8"–5 ply

48" x 72"	.61	
48" x 84"	.64	
48" x 96"	.68	

1/2"–5 ply

48" x 96"	.77	

3/4"–7 ply Veneer Core

48" x 72"	.81	
48" x 84"	.84	
48" x 96"	.88	

3/4"–5 ply Lumber Core

48" x 72"	1.01	
48" x 84"	1.04	
48" x 96"	1.09	
144" x 28" *	1.03	
144" x 42" *	1.03	
144" x 48" *	1.03	

BENDING PANELS

1/8"–3 ply

48" x 72"	.73	
48" x 84"	.77	
48" x 96"	.82	
72" x 48" *	.74	



The A-C Chevrolet showroom in Jersey City, New Jersey, features this lovely Korina WELDWOOD wall and counterfront installation. *Architect:* John Scacchetti.

Korina

This beautiful "blonde" wood, developed exclusively by United States Plywood Corporation, is now one of the most popular cabinet hardwoods on the market. Korina's distinctive appearance makes it just right for smart, modern store fixtures, for cabinet work of all kinds, and for paneled walls in homes and offices.

KORINA resembles Prima Vera in color and grain character but it is much lower in cost. Cabinet makers, woodworkers and fixture manufacturers prefer Korina because it is a sound, clean wood. It is remarkably uniform in both color and grain. And it is in steady supply, the veneers being cut in our own plant in the Belgian Congo.

KORINA can be finished in lovely natural blonde or stained to a darker finish. Carefully matched panels are available in both standard and figured grains. The figured grain panels have exceptionally brilliant markings. Available with either Novoply, lumber or veneer core.

KORINA COUNTERFRONTS. For information on Korina counterfronts, see page 27.

	GOOD TWO SIDES	GOOD ONE SIDE
1/8"–3 ply		
48" x 72"		.52
48" x 84"		.55
48" x 96"		.60
1/4"–3 ply		
36" x 72"		.54
36" x 84"		.57
36" x 96"		.62
48" x 60"		.52
48" x 72"		.54
48" x 84"		.57
48" x 96"		.62
48" x 108"		.69
48" x 120"		.77
3/8"–5 ply		
48" x 96"		.83
1/2"–5 ply		
48" x 96"		.90
NOVOPLY CORE		
3/4"–5 ply		
36" x 72"		.89
48" x 96"		.96
72" x 36" *		.89
72" x 48" *		.89
144" x 42" *		1.01
144" x 48" *		1.01
VENEER CORE		
3/4"–7 ply		
48" x 60"		.95
48" x 72"		.98
48" x 84"		1.01
48" x 96"	1.05	1.43
96" x 48" *		1.01
LUMBER CORE		
3/4"–5 ply		
36" x 72"		1.19
36" x 84"		1.22
36" x 96"		1.27
48" x 60"		1.16
48" x 72"		1.19
48" x 84"		1.22
48" x 96"	1.27	1.67
48" x 120"		1.42
144" x 28" *		1.13
144" x 36" *		1.13
144" x 42" *		1.13
144" x 48" *		1.13
KORINA BENDING PANELS		
1/8"–3 ply		
48" x 72"		.56
48" x 84"		.62
48" x 96"		.66
72" x 48" *		.57

* Counterfronts.

walnut

algoma grade Hardwoods

WALNUT PLAIN SLICED

GOOD TWO SIDES ↓
GOOD ONE SIDE ↓

1/8"–3 ply

36" x 84"	.62	
36" x 96"	.66	
48" x 72"	.58	
48" x 84"	.62	
48" x 96"	.66	

1/4"–3 ply

24" x 84"	.65	
36" x 72"	.60	
36" x 84"	.65	
36" x 96"	.68	
48" x 48"	.54	
48" x 60"	.57	
48" x 72"	.60	.98
48" x 84"	.65	1.12
48" x 96"	.68	
48" x 108"	.80	
48" x 120"	.83	

3/8"–5 ply

36" x 72"	.81	
48" x 72"	.81	
48" x 84"	.86	
48" x 96"	.89	

1/2"–5 ply

36" x 72"	.87	
48" x 72"	.90	
48" x 84"	.92	
48" x 96"	.96	

NOVOPLY-CORE

GOOD TWO SIDES ↓
GOOD ONE SIDE ↓

3/4"–5 ply

30" x 84"	1.07	
36" x 72"	.95	
48" x 72"	.95	
48" x 84"	1.01	
48" x 96"	1.04	
72" x 36"	*.. .99	
72" x 48"	*.. .99	
144" x 36"	*..1.10	
144" x 42"	*..1.10	
144" x 48"	*..1.10	

3/4"–7 ply Veneer Core

48" x 60"	.98	
48" x 72"	1.01	
48" x 84"	1.06	
48" x 96"	1.10	1.55
96" x 48"	*..1.07	
120" x 36"	*..1.10	
120" x 42"	*..1.10	
120" x 48"	*..1.10	

3/4"–5 ply Lumber Core

36" x 60"	..1.19	
36" x 72"	..1.22	
36" x 84"	..1.27	
36" x 96"	..1.31	
48" x 48"	..1.16	
48" x 60"	..1.19	
48" x 72"	..1.22	1.63
48" x 84"	..1.27	
48" x 96"	..1.31	1.76
48" x 120"	..1.46	
144" x 28"	*1.19	
144" x 36"	*1.19	
144" x 42"	*1.19	
144" x 48"	*1.19	

WALNUT QUARTERED

GOOD TWO SIDES ↓
GOOD ONE SIDE ↓

1/4"–3 ply

36" x 60"	.76
36" x 84"	.85
48" x 48"	.73
48" x 60"	.76
48" x 72"	.80
48" x 84"	.85
48" x 96"	.89

3/4"–7 ply Veneer Core

48" x 72"	1.23
48" x 84"	1.28
48" x 96"	1.33

3/4"–5 ply Lumber Core

48" x 72"	1.42
48" x 84"	1.46
48" x 96"	1.51
144" x 28"	*..1.40
144" x 36"	*..1.40
144" x 42"	*..1.40
144" x 48"	*..1.40

PLAIN SLICED WALNUT BENDING PANELS

1/8"–3 ply

48" x 72"	.64
48" x 84"	.69
48" x 96"	.73
72" x 48"	*.. .65

* Counterfronts



Architectural Walnut WELDWOOD
in the Mellon National Bank, Pittsburgh, Pa.
Architects: Harrison and Abramovitz.

Walnut is one of the most widely used decorative hardwoods. It creates dignity, warmth and softness in any interior installation.

Walnut WELDWOOD plywood in Algoma Grade is always of the figured type. It is characterized by pronounced graining and the absence of sapwood. Highly figured walnut with cross-fire is available in limited quantities for fine architectural work. French walnut, somewhat lighter in color than the domestic grade, and Claro, a California walnut with a highly pronounced figure, are other fine species used for custom installations. Cores are either Novoply, lumber or veener.

QUARTERED SLICED WALNUT Matched panel sets of exquisite flitches of quartered sliced walnut are furnished for interiors requiring a brilliant figure. The flitch numbers are branded on the edge of each panel for identification and all panels are center matched.

For information on architectural walnut and walnut counterfronts, see page 27.

algoma grade Hardwoods

Mahogany

African mahogany is one of the finest and least expensive luxury woods available for furniture and cabinet work. It has enjoyed generations of use because of its superior qualities. African mahogany is noted for its fine texture, color, strength and durability. Many woodworkers claim that it can be worked and tooled better than any other wood.

Most of the veneers used for Algoma Grade mahogany WELDWOOD are selected figured African carrying a strong stripe. These panels should not be confused with rotary-cut or half-round mahogany which are sometimes offered in the industry at lower prices. The faces of mahogany WELDWOOD are carefully matched, belt-sanded and polished.

Honduras mahogany one of the most beautiful of all cabinet woods. It has an interesting flat-cut grain pattern that will lend a rich, informal beauty in interior wall installations, as well as in furniture fabrication.



When architects Roche & Roche designed this theatre lobby for B. S. Moss they chose African Mahogany WELDWOOD for all walls. The result is an example of outstanding modern theatre design.

MAHOGANY AFRICAN RIBBON STRIPED

GOOD TWO SIDES ↓

GOOD ONE SIDE ↓

1/8"–3 ply

36" x 84"	.51	
36" x 96"	.54	
48" x 72"	.48	
48" x 84"	.51	
48" x 96"	.54	

1/4"–3 ply

36" x 60"	.48	
36" x 72"	.50	
36" x 84"	.53	
36" x 96"	.56	
48" x 48"	.46	
48" x 60"	.48	
48" x 72"	.50	.75
48" x 84"	.53	
48" x 96"	.56	.86
48" x 120"	.71	

3/8"–5 ply

48" x 72"	.71
48" x 84"	.74
48" x 96"	.77

1/2"–5 ply

36" x 72"	.77
48" x 72"	.80
48" x 84"	.80
48" x 96"	.83

3/4"–7 ply Veneer Core

48" x 60"	.89	
48" x 72"	.92	
48" x 84"	.95	
48" x 96"	.98	1.29
96" x 48"	*.. .92	
120" x 42"	*.. .96	

3/4"–5 ply Lumber Core

36" x 60"	1.10	
36" x 72"	1.13	
36" x 84"	1.16	
36" x 96"	1.19	
48" x 60"	1.10	
48" x 72"	1.13	1.40
48" x 84"	1.16	1.46
48" x 96"	1.19	1.50
144" x 28"	*..1.08	
144" x 36"	*..1.08	
144" x 42"	*..1.08	
144" x 48"	*..1.08	

MAHOGANY BENDING PANELS

1/8"–3 ply

48" x 72"	.51
48" x 84"	.56
48" x 96"	.60
72" x 48"	*.. .55

HONDURAS MAHOGANY

1/4"–3 ply

48" x 96"	$.54

3/4"–7 ply Veneer Core

48" x 96"	.90

* Counterfronts

algoma grade Hardwoods

American Elm

American elm is a useful panel for many industrial and wood-working purposes. Less expensive than most of the hardwoods, it resembles such woods as oak and chestnut and is often used as a substitute for these woods. It is a tough, moderately heavy wood with an attractive figure and will hold hardware exceptionally well.
American elm WELDWOOD is rotary-cut from selected logs and is more uniform and better behaved than most elm plywood. It takes a fine finish.

Prima Vera

Prima Vera, or "white mahogany," is an attractive Central American hardwood. It is characterized by a restrained grain with a simple beauty unlike any other wood. Its lovely golden color takes light finishes beautifully. For information on Prima Vera Counterfronts, see page 27.

Quartered Figured Red Gum

Quartered Figured Red Gum, when made from properly selected and matched veneers, is one of the most attractive woods. Only the finest faces are used and the completed panels are exquisite examples of plywood manufacture.

How to specify Algoma Grade weldwood

Short Specification: Weldwood Plywood shall be Algoma Grade as manufactured by United States Plywood Corporation.
Long Specifications: Plywood shall be Algoma grade, stock panels, as manufactured by United States Plywood Corporation. Faces shall be of one or more pieces of veneer matched for color and grain at the joints to produce continuity of character and balanced design. Faces shall be free of open joints, face depressions, glue stains, or other manufacturing defects. Faces shall be selected for figure, selected for color, or unselected for color, as specified, but shall not contain ruptured grain, doze or shake and shall otherwise equal or exceed the quality requirements of the best grade of that species listed by U. S. Department of Commerce Commercial Standards CS-35-49 or latest revision thereof.
Backs on G1S plywood shall be a species and thickness to balance face veneers and shall be CS 35-49 grade 4 or better.
Plywood shall be sanded both sides and fine belt sanded on the face.
Inner plies shall be sound, with tight joints and of thickness required to produce balanced construction in overall thickness as specified.
Glue bond shall be Urea Formaldehyde hot press method unless otherwise specified.
Plywood thickness shall be as specified with tolerance of plus 0" or minus 1/32" and trimmed to specified sizes plus or minus 1/32".

PRIMA VERA

PRICES ON REQUEST

1/4"–3 ply

36" x 60"
36" x 72"
36" x 84"
36" x 96"
48" x 72"
48" x 84"
48" x 96"

3/4"–7 ply Veneer Core

48" x 72"
48" x 84"
48" x 96"

3/4"–5 ply Lumber Core

36" x 72"
48" x 72"
48" x 84"
48" x 96"
144" x 28" *
144" x 36" *
144" x 42" *
144" x 48" *

ELM, AMERICAN

GOOD ONE SIDE

1/8"–3 ply

48" x 96"	.42

1/4"–3 ply

30" x 72"	.38
36" x 60"	.36
36" x 72"	.38
36" x 84"	.41
36" x 96"	.44
48" x 60"	.36
48" x 72"	.38
48" x 84"	.41
48" x 96"	.44
48" x 108"	.51
48" x 120"	.59

3/8"–5 ply

48" x 72"	.59
48" x 96"	.65

1/2"–5 ply

48" x 84"	.71
48" x 96"	.74

3/4"–7 ply

48" x 72"	.79
48" x 84"	.82
48" x 96"	.86

QUARTERED FIGURED RED GUM

1/4"–3 ply

48" x 72"	.65
48" x 84"	.71
48" x 96"	.75

3/4"–5 ply

48" x 72"	1.25
48" x 84"	1.32
48" x 96"	1.35
144" x 42" *	1.25

* Counterfronts



Philippine Mahogany

Philippine mahogany WELDWOOD is a lower-priced cabinet hardwood panel that has alternate light and dark stripes. It has been a great favorite with fixture manufacturers, cabinet-makers and wood-workers for many years because of its fine appearance, lower cost, and ease of fabrication.

Philippine mahogany WELDWOOD is made from the best logs imported from the Philippine Islands. Its manufacture is typical of the finest type of veneering. Not only is it adaptable to use as a core material, but it is also furnished in an exterior grade. For information on the exterior type of Philippine Mahogany, see page 30.

Cherry Weldwood

is a handsome cabinet wood that is similar to walnut in grain figure. The color of this panel varies from light to dark reddish-brown and it takes finishes beautifully. Available in ¼" thickness in standard panel sizes.

A simple wall of Philippine mahogany WELDWOOD makes a dramatic foil for modern furnishings. Architect Vincent G. Kling used this WELDWOOD extensively in his own home.

RIBBON STRIPED PHILIPPINE MAHOGANY

	GOOD TWO SIDES	GOOD ONE SIDE
1/4"–3 ply		
48" x 60"	.36	
48" x 72"	.36	
48" x 84"	.36	.46
48" x 96"	.36	.46
48" x 120"	.38	
3/4"–7 ply		
48" x 72"	.67	.82
48" x 96"	.74	.82
48" x 120"	.86	

MARINE RIBBON STRIPED PHILIPPINE MAHOGANY

		GOOD TWO SIDES	GOOD ONE SIDE
¼"	48" x 96"	.39	.48
⅜"	48" x 96"	.53	.62
½"	48" x 96"	.59	.67
⅝"	48" x 96"	.63	.72
¾"	48" x 96"	.82	.89

ROTARY PHILIPPINE MAHOGANY

	GOOD TWO SIDES	GOOD ONE SIDE
1/4"–3 ply		
48" x 84"	.32	.38
48" x 96"	.32	.38
3/8"		
48" x 96"	.42	.47

Rotary Philippine Mahogany (continued)

3/4"–7 ply

30" x 60"	.69
36" x 60"	.69
48" x 72"	.69
48" x 84"	.69
48" x 96"	.69 .74
48" x 120"	.77

ROTARY PHILIPPINE MAHOGANY CORE STOCK

Prices and sizes on request.

CHERRY

1/4"

48" x 72"	.55
48" x 84"	.57
48" x 96"	.60



Weldwood plywood for interior use is guaranteed for the life of any building in which it is installed

Beautifully Figured Woods

The unusually large assortment of WELDWOOD Hardwood Plywood is the finest and most complete in the world. The veneers are cut from the most valued woods from nearly every continent . . . from the tree felled in the heart of the Belgian Congo . . . the stands of South America . . . the islands of the Pacific . . . Canada's great forests of the far north and the vast timberlands of our own country. The eight typical woods shown here are reproduced in their natural color to suggest the beauty which identifies genuine WELDWOOD panels. These finishes can be lightened or darkened as may be required. However, it should be kept in mind that there is a natural variation in the grain of all wood. We invite you to inspect the panels themselves for a full appreciation of their rich and handsome appearance.



American Elm





African Mahogany





White Oak







Korina





Philippine Mahogany





Birch



Honduras Mahogany





Idaho Knotty Pine





Sliced Walnut




Architectural Weldwood

Made from exquisitely matched veneers, Architectural WELDWOOD panels represent the art of wood veneering at its highest point of perfection.

Such species as figured mahogany, Brazilian rosewood, figured oak, cherry, figured walnut and Korina are usually carried in stock. These stock panels are sequence-numbered which makes possible a perfectly matched installation.

Also WELDWOOD panels can be custom-made to individual architectural requirements. There is a wide assortment of choice veneers from which to choose. A flitch room, stocked with samples of these veneers, is maintained at the Weldwood Building, New York City. This room is at your disposal at all times. Quotations on custom-made Architectural WELDWOOD will be made upon receipt of detailed specifications. In addition, Architectural WELDWOOD panels can be obtained on fire-resistant wood or mineral cores. Poplar and basswood core stocks are available for cabinet-makers who do their own veneering.

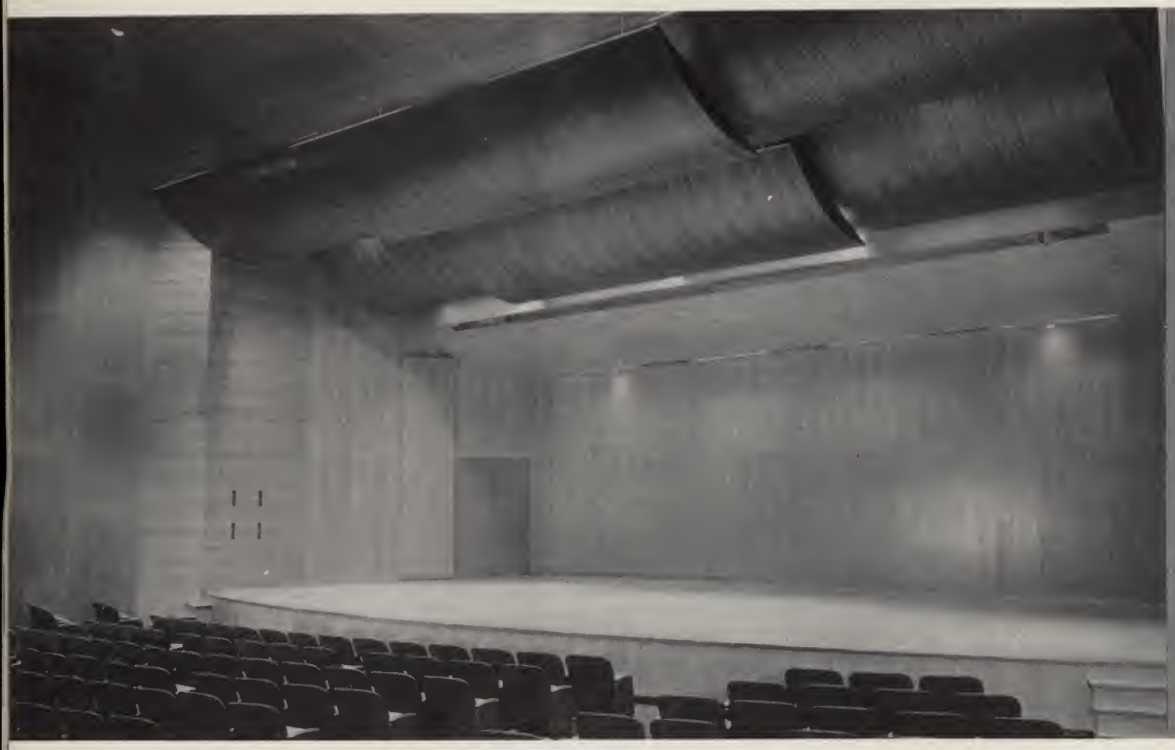

Architectural Korina WELDWOOD on the walls and figured Paldao WELDWOOD on curved ceiling panels at the Grace Rainey Rogers Auditorium in The Metropolitan Museum of Art, New York. *Architects:* Voorhees, Walker, Foley & Smith.

how to specify architectural grade weldwood

Short Specification: Plywood shall be Weldwood Plywood, Architectural Grade, sequence matched, as manufactured by United States Plywood Corporation.

Long Specification: Plywood shall be Weldwood Plywood, Architectural Grade as manufactured by United States Plywood Corporation. Unless otherwise specified, plywood shall be 5-ply lumber core construction with an overall thickness of 3/4 inches; tolerance: 0" over or 1/32" under. Plywood shall be glued with waterproof phenol formaldehyde resin glue and processed by the hot plate method.

Face veneer shall be from flitches specially selected and approved for architectural adaptation, with respect to cutting lengths, uniformity of color, figure, grain character, or other special requirements.

Faces shall be of one or more pieces of veneer matched for color and grain at the joint to produce balance and continuity of character. Faces shall be selected for figure, selected for color, or unselected for color as specified, but mineral streaks and discolorations, wormholes, ruptured grain, loose texture, doze or shake shall not be admitted. Pieced veneers shall be parallel clipped, jointed by tapeless splicer and edge glued. In matching sliced or sawn veneers unless otherwise specified, pieces shall be bookmatched and of corresponding width on each side of the center joint or adjacent panels. Face veneers shall not contain open joints, face depression, glue stain or other manufacturing irregularities. Back veneers on G1S plywood shall be of species to properly balance face.

Panels shall be sanded both sides, and fine belt sanded on the face side to provide suitable surface for finishing.

Lumber core to consist of Basswood or Poplar strips not to exceed 3½" in width and edge glued under pressure with urea resin glue high frequency cured.

Crossbands shall be 1/16" thick of either Basswood or Poplar unless otherwise specified. Crossbands shall be sound veneer of random widths with edges jointed and glued.

Panels shall be trimmed in width and length to the specified measurement plus or minus 1/32 of an inch unless otherwise specified.

Architectural Grade



Tellers' counter of Walnut Weldwood. First Federal Bank of Hempstead, Hempstead, L. I. Architects: Alfred Hopkins Asso.

Counterfronts

Weldwood Counterfronts have long been preferred by fixture manufacturers and have been used for many of the prize installations throughout the country. They are not only handsome but are structurally superior as well.

Weldwood Counterfronts are laid up in a special machine which holds the 1" wide kiln-dried staves in position without edge-gluing until the one-piece basswood cross banding has been applied. Therefore, any movement of an individual stave is not transmitted to adjoining staves but is taken up by the minute spacing between staves. As a result, practically no expansion or contraction occurs in the panel.

In addition to the ¾", 5-ply lumber core construction, there are ¾" fir veneer core counterfronts at considerably lower prices. These are made with the same selected, perfectly matched face veneers as the lumber core panels. They are available in 144", 120" and 96" widths.



Novoply core counterfronts round out the Weldwood counterfront line. They are the least expensive quality counterfront on the market and have become extremely popular because of their dimensional stability and ease of fabrication.

For sizes and prices of both cabinet and architectural grades, see the price listings on each individual hardwood page in this catalog.

ARCHITECTURAL GRADE HARDWOOD

¾" Lumber Core

GOOD ONE SIDE

Cherry

48" x 96"	$1.50
48" x 120"	1.58

Brazilian Rosewood

48" x 84"	2.17
48" x 120"	2.32

Korina

48" x 96"	1.58
48" x 120"	1.58
144" x 42"	1.58

Mahogany—Fiddleback

48" x 96"	1.82

Mahogany—Quilted Honduras

48" x 96"	1.73
48" x 108"	1.80
48" x 120"	1.88
48" x 144"	2.03

Walnut

48" x 96"	1.73
48" x 108"	1.95
48" x 132"	2.02
48" x 144"	2.55

For prices on Weldwood Counterfronts, see individual wood.

Southern Gum hardwoods . . .

Gum, a Southern hardwood, is a highly useful wood that is made in a wide variety of grades. It can be used for both low-cost installations as well as the finest cabinet jobs. Since it shows no grain raise, it is a desirable wood for painted work.

The ¼" WELDWOOD Gum plywood panels are made with heavy cores and thin faces—a construction far superior to the ordinary "three-equal-ply" construction. Tight cut veneers are used exclusively and the panels are hot-plate bonded with plastic, water-resistant resins. The 1-3 grade is recommended where natural finish or stain is used. The 2-3 grade will be found satisfactory for paint finish. The 3-3 grade, while technically described as "reject," will yield good clean cutting and is generally used for backs and concealed construction.

WELDBORD The perfect all-around utility panel. Ideal for low-cost walls, furniture drawer bottoms and backs, partitions, display work and countless other applications. Expertly made of 3-ply hardwood, these strong, rugged panels are quite different from the usual "gum" panels. They are smoothly sanded on two sides, hot-plate bonded and resin glued. Because it shows no grain raise, WELDBORD can be painted or stained beautifully or is suitable for a natural finish.

SELECTED WHITE GUM Another excellent general utility panel. They paint or enamel beautifully and take a most satisfactory Maple, Walnut or Mahogany stain.

SELECTED RED GUM Faces on these panels are of carefully selected sap-free veneers. They can be used in natural finish or stained either Walnut or Mahogany.

QUARTERED FIGURED GUM, see page 22.



A natural finish applied to Southern Gum WELDWOOD paneling is effective for both residential and commercial interiors.

UNSELECT GUM 1-3

GOOD ONE SIDE

1/8"–3 ply

36" x 60"	.19
48" x 60"	.19
48" x 72"	.20
48" x 84"	.22
48" x 96"	.23

3/16"–3 ply

30" x 48"	.22
36" x 48"	.22
48" x 96"	.23

1/4"–3 ply

24" x 72"	.23
24" x 84"	.24
24" x 96"	.25
30" x 60"	.21
30" x 72"	.23
30" x 84"	.24
30"x 96"	.26
36" x 48"	.21
36" x 60"	.22
36" x 72"	.23
36" x 84"	.24
36" x 96"	.26
48" x 48"	.21
48" x 60"	.21
48" x 72"	.23
48" x 84"	.24
48" x 96"	.26

3/8"–5 ply

36" x 72"	.38
36" x 96"	.41
48" x 48"	.36
48" x 60"	.36
48" x 72"	.38
48" x 84"	.39
48" x 96"	.41

1/2"–5 ply

36" x 72"	.43
36" x 84"	.46
48" x 60"	.44
48" x 72"	.43
48" x 84"	.44
48" x 96"	.45

3/4"–7 ply

36" x 72"	.62
36" x 84"	.63
36" x 96"	.65
48" x 60"	.61
48" x 72"	.62
48" x 84"	.64
48" x 96"	.65

WELDBORD

GOOD ONE SIDE

1/4"–3 ply (1–3)

60" x 48"	.17
72" x 48"	.17
84" x 48"	.17
96" x 48"	.17
96" x 48" (2–3 Grade)	(Prices on request)
96" x 48" (3–3 Grade)	(Prices on request)

1/2"–5 ply

96" x 48"	.36

3/4"–7 ply

96" x 48"	.48

UNSELECT GUM (2-3)

Available on special order accumulation basis.

SELECT WHITE GUM

1/4"–3 ply

36" x 48"	.29
48" x 96"	.33

1/2"–5 ply

48" x 96"	.55

3/4"–7 ply

48" x 84"	.71
48" x 96"	.72

SELECT RED GUM

GOOD ONE SIDE

1/4"–3 ply

48" x 72"	.35
48" x 84"	.35
48" x 96"	.36

3/4"–7 ply

48" x 96"	.76

special low cost hardwoods

SAMARA
GOOD ONE SIDE

1/8"–3 ply
48" x 84" $.20
48" x 96" 20

1/4"–3 ply
48" x 84" 27
48" x 96" 27

3/4"–7 ply
48" x 96" 72

SAMARA—EXTERIOR
GOOD TWO SIDES

1/4"–3 ply
48" x 96" 33
48" x 120" 36
48" x 144" 39
48" x 168" 45
48" x 192" 48

NAKORA
GOOD ONE SIDE

1/4"–3 ply
48" x 96" 36

3/4"–7 ply
48" x 96" 82

ROTARY LIMBA
GOOD ONE SIDE

1/4"–3 ply
48" x 96" 32

3/4"–7 ply
48" x 96" 78

BIRCH
GOOD ONE SIDE

1/8"–3 ply
60" x 60" 20

1/4"–5 ply
60" x 60" 26

3/4"–5 ply (Lumber Core)
48" x 96" 68
96" x 48" 68
120" x 48" 68

3/4"–14 ply
60" x 60" 63

POPLAR
SOUND ONE SIDE

1/8"–3 ply
48" x 96" 17

ROTARY PHILIPPINE MAHOGANY

1/8"–3 ply (Utility Grade)
36" x 72" 15

RIBBON STRIPED LAUAN
GOOD ONE SIDE

1/4"–3 ply
48" x 96" 35



Low-cost WELDWOOD Samara panels have a rich, swirly grain pattern that is very interesting on interior walls.

Special *low-cost* imported hardwoods are also available. There are many fine wood species—manufactured to exact WELDWOOD standards—from the European continent, Japan, Africa and the Philippine Islands. Available in a variety of panel sizes and thicknesses.

Samara is a new low-cost African hardwood panel that has the same distinctive wood beauty of higher-priced paneling. Made in French Equatorial Africa, these rotary-cut panels have a rich, swirly grain pattern and a light coloring. They are priced right for all low-budget building and remodeling work. Of all-hardwood construction, many Samara panels have one-piece faces and such sound backs that they may often be used as a good-2-sides panel. The interesting grain pattern makes Samara panels ideal for low-cost interior wall paneling. They are also suitable for drawer bottoms, cabinet linings, backing sheets, etc. Samara is also available with a phenolic glue line in long length panels having tight cores—all-hardwood—which are suitable for the boat building trade. They may be obtained with a scarf joint in lengths up to 16′. Longer lengths are available on special order.

Nakora is a special, low-cost Japanese hardwood panel—manufactured to WELDWOOD's quality standards. It is a rotary-cut blonde wood with a pronounced grain pattern. Ideal for wall paneling and other interior installations. Its sound back makes it perfect for low-budget furniture and cabinet construction, too.

Exterior and Marine Weldwood



EXTERIOR AND MARINE WELDWOOD

panels are made with phenol formaldehyde plastic resin—an absolutely *waterproof* adhesive that bonds the plies together. They are the perfect panels for outdoor use because the glue bond is permanently insoluble. These panels resist water and weather in all extremes—the glue line will not rot or delaminate. Both Exterior and Marine WELDWOOD have the same waterproof bond and can be used interchangeably. The only difference between them is in the core construction.

FOR BOAT CONSTRUCTION AND REPAIRS

Exterior and Marine WELDWOOD is backed by an aggressive advertising and labeling program that is making these panels the best-known and most-used plywood in the boating industry. Both grades are 100% waterproof—and are *guaranteed* not to delaminate in marine construction. Exterior Grade can be used in the construction of transoms, bulkheads, hull planking on small pleasure craft, cabin siding and lining, decking, etc. For racing craft, high-power outboards, cruisers and commercial ships, the Marine Grade is recommended. Available from stock in Douglas Fir, or decorative hardwoods such as Philippine mahogany and Samara.

FOR BUILDING CONSTRUCTION

Exterior WELDWOOD is ideal for siding and other exterior applications on homes, garages, farm buildings, poultry houses, etc. The big-size panels go up quickly with minimum labor costs, and assure a durable, weatherproof wall of great structural strength.

FOR OUTDOOR SIGNS AND FURNITURE

There is no danger of panel delamination regardless of rain, snow or heat if Exterior WELDWOOD is used to construct permanent outdoor signs and furniture.

FOR RAILROAD USE

The railroad industry uses Exterior WELDWOOD for exterior applications on stations, work buildings, and shop structures—as well as in the construction of many types of railroad freight and passenger cars.

Exterior and Marine WELDWOOD panels are available from stock in such woods as Douglas Fir, Samara and Philippine Mahogany. Any wood can be made in the Exterior grade if quantities warrant.

Exterior Weldtex, which will not "check" in outdoor installations, is particularly recommended for many exterior applications. (See page 10.)

SPECIAL PLYWOODS

Die Boards are made of carefully selected veneers, fabricated to precise thickness. Most boards have five equal plies of the same wood for maximum durability. The veneers stay tight and edges cut evenly.

Aircraft WELDWOOD is a light-weight, strong structural plywood made with waterproof adhesives. Used for aircraft and glider construction or wherever a combination of light weight and strength are required. Available with the grain of the surface veneer running at either a 45° or 90° angle. (These panels are also adaptable to the display field and other decorative construction work.) Government Specifications MIL—P—6070.

Basswood is a light-colored, soft wood that is popular because of its good behavior. The lightest weight panel in general use, Basswood is ideal for jig-sawing and manual training work. Takes paint or enamel perfectly.

Bending Panels offer the flexibility necessary to create bent or curved effects in wood paneling. They are made in 2-ply construction for bending with the grain of the face veneer; and in 3-ply construction for bending across the grain. The 3-ply is recommended for forming cylindrical shapes and columns. When ordering, give detailed information such as size, grain direction of face veneer, and direction of the curvature in relation to the face grain.

AIRCRAFT PLYWOOD

Birch 90°

1/16"
48" x 96" 90
3/32"
48" x 96" 93
1/8"
48" x 96" 96
1/4"
48" x 96" 1.58

Mahogany 90°

1/16"
48" x 96" 90
3/32"
48" x 96" 93
1/8"
48" x 96" 96
1/4"
48" x 96" 1.58

DIEBOARDS—Birch or Maple

1/2"
24" x 36" 90
36" x 48" 90
5/8"
24" x 36" 1.08
24" x 48" 1.08
36" x 48" 1.08
11/16"
24" x 36" 1.13
24" x 48" 1.13
36" x 48" 1.13
3/4"
24" x 36" 1.16
24" x 48" 1.16
36" x 48" 1.16

BASSWOOD PROFILES

3/20"
120" x 48" 40
3/16"
120" x 48" 42

BENDING PANELS

1/8"–3 ply

GOOD ONE SIDE

Available in Unselect Birch, Korina, Rift Oak, Sliced Walnut, Quartered Walnut, and Mahogany. For prices see page describing individual wood.

Bending panels also available in 1/8" 2 ply, unbalanced construction.

EXTERIOR AND MARINE FIR WELDWOOD

(For sizes and thicknesses, see page 5.)

PHILIPPINE MAHOGANY MARINE GRADE

(For sizes, thicknesses and prices, see page 23.)

SAMARA, EXTERIOR

(For sizes and prices, see page 29.)

WELDTEX, EXTERIOR TYPE

(For prices, see page 10)

WELDTEX SIDING

(For prices, see page 10)

Tekwood* Products

Low-cost WELDWOOD Tekwood products are made by laminating quality hardwood veneers and paper boards into a balanced panel, using a urea formaldehyde resin glue. The cross-laminating process used is identical to that used in the manufacture of exterior-grade plywood. The quality hardwood cores of Tekwood panels are predominately birch and maple veneers — free of rot, disease and decay. The faces are of thick cylinder Kraft paperboard.

WELDWOOD Tekwood panels can be used in a variety of applications because they are easy to work, handle, assemble and store. Ideal for packaging and materials handling, toys and games, furniture, luggage, displays and exhibits, vehicle interiors, utility partitions, recreational shelters — and maintenance and repairs, indoors and outdoors.

Tekwood panels can be easily fabricated, using either wood-working or metal-working machinery. Takes printing, lithographing, silk-screening, flocking and embossing. Die-cuts cleanly with no sharp edges. No sanding or prefinishing is necessary.

Tekwood is light in weight and flexible—yet, exceptionally strong. It won't buckle, shatter, splinter, dent, tear or crease. Can be sawed, routed, bent, folded, scored, sheared, scarfed, riveted, stapled, nailed, taped, glued, strapped, etc. Tekwood can be preformed or post-formed in various shapes, bending to radii as small as 1".


WELDWOOD Tekwood is available in 48"x48" and 48"x96" panel sizes — in various construction combinations in many different thicknesses. These constructions are listed below. Additional information can be obtained from your nearest WELDWOOD branch office.



Shippers report considerable savings (including weight and damage savings) with containers made from lightweight rugged Tekwood.



Tekwood is a favorite for constructing children's toys, such as this doll house made by Keystone Manufacturing Co.

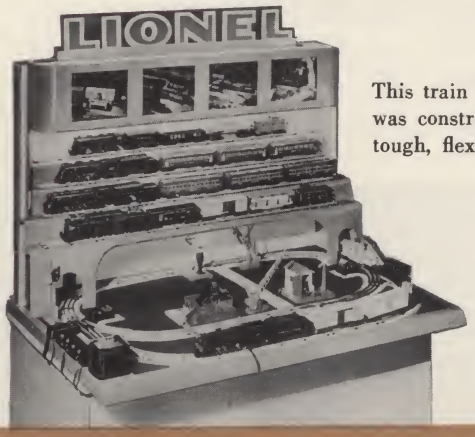

This train counter display was constructed from tough, flexible Tekwood.

PRODUCT	DESCRIPTION	THICKNESSES	PRICE PER SQ. FT.
SUPER TEKWOOD *(Cylinder Kraft faces)*	For all interior uses. The highest quality paper over-laid veneer available. Stronger than plywood of same thickness.	1/8", 1/7", 3/16"	9¢ — 13¢
PROTEKWOOD *(Plain resin or asphalt impregnated faces)*	For exterior use, outdoor shelters, export packaging, etc. A high strength, special moisture-resistant panel, yet light in weight.	1/7", 3/16"	10¢ — 14¢
UTILITY GRADE TEKWOOD *(Thin Kraft faces)*	Low cost packaging and utility panel manufactured from quality materials and greatly exceeding requirements of government specifications.	1/13", 1/11", 1/9" 1/8"	7¢ — 9¢
PLASTIC COLOR TEKWOOD	A cost saving prefinished panel, available in seven standard colors (red, blue, green, yellow, ivory, black and white) and in custom colors to match special requirements on quantity orders.	1/8", 3/16"	13¢ — 18¢ (color 1 side) 17¢ — 22¢ (Color 2 sides)
CHIPBOARD TEKWOOD	A grey Chipboard for toys and novelties, yet sturdy for jig saw puzzles and other die cut articles. Lithograph or coated designs can be pasted on face without warping.	1/8", 1/7", 3/16"	8¢ — 12¢
VULCANEER *(Vulcanized fibre faces)*	The strongest of all Tekwood panels combining the tough wear-resistance face of fibre with the stiffness of wood. Can be formed, shaped and fabricated for trunks and hand luggage, for industrial tote-boxes, hand carts, and all types of re-usable containers.	1/11", 1/10", 1/8"	30¢ — 35¢

ALL TEKWOOD PANELS ARE AVAILABLE IN 48"x48" AND 48"x96" SIZES. ON QUANTITY ORDERS, TEKWOOD PANELS CAN BE PRODUCED IN CUT-TO-SIZE PANELS, AND IN SPECIAL THICKNESSES, AND WITH SPECIAL FACES OR CORE CONSTRUCTIONS TO MEET CUSTOMER REQUIREMENTS.

*A patented product—U.S. Pat. Nos. 1997344 and 2405235. T.M. Reg.



Restaurant table tops made of colorful Mardi Gras Micarta.

Star Dust—a new Micarta pattern, available in a variety of colors, that will add new beauty to the design of distinctive furniture surfaces.

Westinghouse Micarta*

Micarta is an extraordinarily durable, high-pressure plastic laminate of exceptional beauty. It is resistant to chipping, denting, breaking—defies cigarette burns, won't stain, even with grease or fruit acids—is easy to clean and never needs refinishing!

The combination of genuine surface ruggedness, ease of maintenance and unusual decorative beauty has made Micarta a favorite in the building field. It is widely used for table tops, bar tops, furniture . . . sink tops and other kitchen work surfaces, wall show cases in shops or showrooms . . . or any surface which encounters hard wear, must have good appearance and be easily cleaned.

* Micarta is manufactured by the Westinghouse Electric Corporation and distributed exclusively by United States Plywood Corporation.



Table and counter of Micarta match Korina WELDWOOD cabinets in this decorative and highly functional kitchen. Home of Mr. and Mrs. George P. Skouras.



THICKNESS	ITEM	UP TO 200 SQ. FT.	200 TO 999 SQ. FT.	OVER 1000 SQ. FT.
1/16" Sheet Stock (For Non-Standard Sizes add 10% to Prices.)	Black	.74	.65	.60
	Patterns & Trugrains	.81	.74	.68
	Standard Colors	.92	.81	.72
	Decorator Colors	.99	.87	.83
	White	1.04	.92	.86
7/8" Factory-glued Panels	Black	1.80	1.65	
	Patterns & Trugrains	1.80	1.65	
	Standard Colors	1.88	1.73	
	Decorator Colors	1.98	1.83	
	White	1.98	1.83	
1¼" Factory-glued Panels	Black	1.98	1.85	
	Patterns & Trugrains	1.98	1.85	
	Standard Colors	2.06	1.94	
	Decorator Colors	2.24	2.09	
	White	2.24	2.09	
5/32" Micartabord	Black	.77	.71	.68
	Patterns & Trugrains	.86	.80	.75
	Standard Colors	.89	.83	.80
	Decorator Colors	.98	.90	.87
	White	1.08	.99	.96
	1/8" Kickplate Stock 48" x 96"	1.08	.99	.96
	.045 Backing Sheets	.23	.20	.18

Micarta is available in a wide range of brilliant colors, earthy pastels and patterns (such as handsome Mardi Gras and the new Star Dust pattern). There is also a wide range of photographic wood reproductions, too.

Micarta is manufactured in 1/16" thick sheets, in 5/32" Micartabord or factory-bonded to ¾" and 1⅛" WELDWOOD plywood in a variety of convenient sizes.

FACTORY-BONDED MICARTA PANELS Micarta, permanently bonded to either ¾" Novoply or ¾" and 1⅛" WELDWOOD Plywood, is in a form that any jobbing carpenter, builder or home handyman can use, and is a highly salable lumber dealer item. All colors and patterns are available in these factory-bonded Micarta panels.

MICARTABORD FOR WALLS Micartabord is ideal for all large surface applications. It is easily erected over existing plaster or other walls where its permanent colors and durable surface make a handsome, easily maintained installation. Micartabord is made by molding Micarta to tempered hardboard. The finished plastic faced panel is 36" x 96" and 48" x 96" in 5/32" thickness.



The Micarta DeLuxe Unitop

is a new one-piece kitchen and bath counter top with a coved backsplash and a no-drip front edge which eliminates the need for molding. (See illustration above.) This unique construction eliminates dirt-catching angles and moisture-holding seams. It will resist acids, heat and cold . . . won't chip, splinter or corrode. Easy to clean . . . and economical in price.

The surface is colorful 1/16" Westinghouse Micarta laminated to a ¾" core. Comes in linen, pearl and Mardi Gras and Star Dust patterns.

Available in 3 stock lengths—60", 72" and 96".

For an L-shaped kitchen layout, Deluxe Unitops are available with a corner miter cut. Prices on request.

Armorply* is WELDWOOD plywood faced with metal such as zincbond steel, stainless steel, aluminum, copper, etc. In one material, this unique paneling gives the strength, lightness, rigidity and easy fabrication of plywood plus the toughness, long life and fireproofness of metal.

Architectural Applications: For exterior or interior installations, Armorply is a building material that is not only structurally sound but also has excellent decorative possibilities. Ideal for counter-fronts, work surfaces, building fronts, kitchen cabinets, office partitions, sliding doors, etc.

Industrial Applications: Armorply is a strong, rigid material that has also helped solve many difficult problems in the designing, engineering and fabricating of products for industry. Some of these include: truck and trailer bodies, refrigeration equipment, elevator cabs, grain sifters, carrying cases, processing machinery, metal-and-wood furniture, storage tank tops and many other applications. Armorply is made to specification with all standard thicknesses of plywood and the various metals. For all the facts, write for the Armorply Brochure.

Porc-Lin-Ply is a weatherproof porcelain-faced panel for constructing building fronts, and as interior paneling in stores, schools, offices and hospitals. Made with a WELDWOOD exterior-grade hardwood core faced with colorful, hard-to-mar porcelain and backed with rust-resistant steel. The porcelain facing will not fade, peel, crack or stain—resists scratching, denting and chipping. The exterior-grade hardwood core is weatherproof—and the steel backing balances the lamination, assuring straight panels. Thickness 5/16″. Comes in 36″ x 96″ stock size sheets in a variety of rich colors. Complete line of alumilited moldings available for proper installation. Prices on request.

Weldwood Chalkboard is a material specially designed for use as a writing surface for chalk. It is made by bonding a special porcelain-surfaced steel to ¼″ exterior-grade WELDWOOD Fir plywood with a metal backing sheet. The resulting board is rigid and perfectly flat.

WELDWOOD Chalkboard's surface is exceptionally durable—defies abrasion, scratching, chipping, cracking or denting. It is easily and quickly cleaned and never needs refinishing. Made in a pleasing green color. Other colors available on special order.

Ideal for use as a chalkboard in the classroom, laboratory and office . . . also makes a practical desk top and bulletin board. Stock widths: 36″, 42″ and 48″. Standard lengths: 72″, 84″, 96″, 108″ and 120″. A sample will be supplied on request—as well as complete details on WELDWOOD Aluminum Chalkboard Trim which is available for all WELDWOOD Chalkboard installations.

Contact your WELDWOOD branch office for the name of the WELDWOOD Chalkboard Distributor in your area.




WorkSaver Body Company used light-weight WELDWOOD Armorply to design this truck body with unique side-loader.



Stainless steel WELDWOOD Armorply forms the distinctive counterfront in the Royal Dutch Airlines offices, New York. *Designer:* Louis Shulman.



Store fronts, fascias and soffits are only a few of the many exterior installations possible with WELDWOOD Porc-Lin-Ply panels.

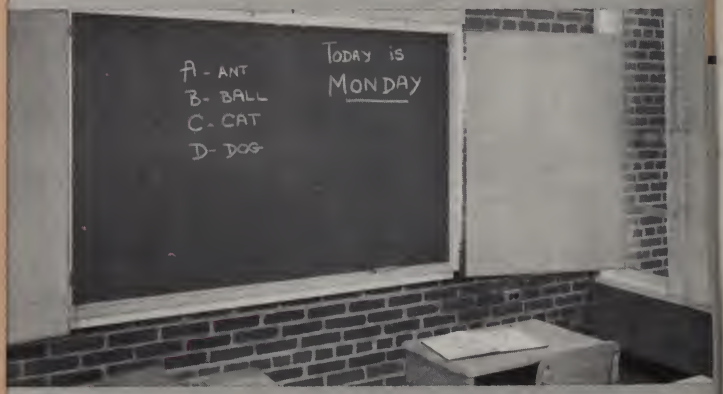

Sliding panels cover this WELDWOOD Chalkboard installation in Darien Junior High School, Darien, Conn. *Architects:* Ketchum, Gina & Sharp.

* U. S. Pat. Nos. 2149882 and 2255151 • T. M. Reg.



WELDWOOD MOLDINGS are made of aluminum with faces of genuine hardwood veneers to match the faces of the most popular types of WELDWOOD plywood. With these moldings, WELDWOOD paneling can be speedily and economically erected. Furnished in 8-ft. strips for inside corners, outside corners, caps and dividers for both ¼" and ¾" plywood panels.

In addition, there are all-plywood Cove Moldings for cabinet and room corners, lighting coves and window trim. They come in two styles—the "Regular Cove" and the "Sharp Angle Cove," the latter being made with a sharp 1¾" radius. Both are made in concave and convex shapes with both long and short grains. Available from stock in 8-ft. strips in the woods listed on this page.



Forming Grade Armorply

Forming Grade Armorply is a unique product capable of bending to a right-angle or to a radius. It can be sawn, sheared, perforated, and otherwise fabricated by conventional equipment. Its remarkable stiffness and lightness of weight makes it an ideal material for containers, ducts, ceilings, etc. Thickness: ⅛".

MOLDINGS

All prices per lineal foot.
Available in the following woods: Korina, Oak, Mahogany, Maple and Walnut.

1/4"

End Cap	.44
Divider	.36
Outside Corner	.50
Inside Corner	.50

3/4"

End Cap	.48
Divider	.48
Outside Corner	.59
Inside Corner	.59

PEW SEATS A standard molded plywood Pew Seat is now available in such handsome woods as Korina, Walnut, Oak, Maple and Mahogany. It is particularly suitable for use in churches, courthouses, rail, air and bus terminals.

COVE MOLDINGS

Convex Long Grain	.73
Concave Short Grain	.73
Convex Short Grain	.73
Concave Long Grain	.73

FIRE-RESISTANT PANELS For installations where fire-resistant materials must be used, WELDWOOD plywood can be obtained impregnated with fireproofing solutions. Made with cores of fire-resistant veneer, lumber or an incombustible mineral material, these treated panels are acceptable under Fire Underwriters' codes.

The panels with veneer cores are available from stock in Plain Sliced Walnut, Quartered Walnut, Rift Oak, Birch, Mahogany or Korina. Fire-resistant Douglas Fir plywood, A-B Grade, Exterior, is also in stock. The lumber core and incombustible mineral core panels are furnished on special order.

See page 42 for complete information on WELDWOOD's fire-resistant Partition Panels. Made with an incombustible mineral core and faced both sides with wood veneer, these panels offer outstanding advantages PLUS low cost.

FIRE RESISTANT PANELS

3/4"

48" x 96"

Birch	1.53
Korina—Figured	2.04
Mahogany	2.04
Oak, Rift	2.18
Walnut, Plain Sliced	2.18
Walnut, Quartered	2.33

Kalistron

KALISTRON is a clear, highly abrasive-resistant, chemically engineered sheeting with color permanently fused to the underside. It is especially designed for articles or areas where hard usage is encountered and for applications requiring an easily maintained covering material of exceptional beauty and durability.

While KALISTRON is stocked in 33 standard colors, almost any shade or special design of multiple colors may be obtained on order. Since the color or pattern is applied to the back of clear sheeting, the application is permanent and never shows wear. A fine cellulose flock backing adds further protection and permits easy bonding to practically any surface. KALISTRON cleans easily and is unaffected by common stains.

KALISTRON is easily applied to flat surfaces, contoured parts or post-forming materials. It is an ideal wall-covering material recommended for use in hospital and hotel corridors, schools, restaurants, elevator cabs, department store walls, tables and counter tops, etc.

KALISTRON is also an excellent upholstery fabric for office and home furniture, bar stools, shelving and wall application in corded or tufted forms, applied by means of studded nails or upholstery tacks.

Utility-Grade KALISTRON has been developed as a relatively low cost wall covering for use above the wainscot and other jobs *where wear and tear is not a primary factor*. It is a clear chemically engineered sheeting with color and flock fused to the underside. It has an attractive, rugged-looking burlap weave texture. It is easy to apply and needs little maintenance. Available now in 35-yard rolls, 54″ in width. Colors include: Dark Wine, Light Coral, Light Blue Green, Light Grey Green, Tan, Sunshine Yellow and Light Grey. Prices on request.

decorative products and laminated specialties

Flexwood

WELDWOOD FLEXWOOD is genuine wood veneer cut to 1/85 of an inch, glued under heat and pressure to a cotton backing. A patented flexing operation produces a pliable sheet which may be applied by hand to any dry, smooth, hard surface, flat or curved. Standard sizes are 12 to 24 inch widths, and 8, 10 and 12 foot lengths.

FLEXWOOD is a wall covering material which makes a luxurious, distinctive interior. It has been used for some of the nation's finest offices, stores, institutions and homes. More than forty different domestic and imported woods, in many choice grains and figures, are available. Quick and easy to apply, FLEXWOOD goes on existing surfaces.

The definite economy of FLEXWOOD interiors is particularly emphasized in sheer wall and other modern treatments. When used in buildings governed by city fire ordinances, FLEXWOOD minimizes re-decorating costs.

WELDWOOD FLEXWOOD is available in architectural-grade (described above) and random-grade. The random-grade is exquisite wood paneling in "flexible form" glued to cotton backing with water-resistant adhesives. The veneers, however, are *unmatched veneers* which will produce startling textured effects in interior paneling. Available in such fine woods as mountain tulip, prima vera, tiger wood, oak, birch, mahogany, walnut and red gum. Each flexible sheet is 8′ long and 15″ wide. Comes neatly packaged with enough sheets to cover 100 sq. ft. Prices on request.

Information and prices of Weldwood Flexwood, and Kalistron may be secured by writing directly to:

Flexible Materials Division, UNITED STATES PLYWOOD CORPORATION
Weldwood Building, New York 36, N. Y.

Please give full particulars as to intended use so that we may supply complete data and the name and address of a supplier in your locality.



above: This colorful-looking restaurant features both Kalistron-covered walls and upholstery.

below: The walls of this exquisite showroom are covered with satinwood Flexwood. Trifari, Krussman & Fischel, Inc., jewelers.

Weldwood Hardboard Products

WELDWOOD STANDARD HARDBOARD has a hard, smooth surface on one side and a screen impression on the other side. It is light brown in color and weighs approximately 67 lbs. per cu. ft., which is evidence that it is denser than most woods. Recommended for interior use only, it is ideal for walls, ceilings and other interior surfaces where it will not encounter unusually hard wear or extreme conditions of humidity.

WELDWOOD TEMPERED HARDBOARD is stronger than WELDWOOD STANDARD HARDBOARD. It has been impregnated with a special tempering compound polymerized by baking. This treatment not only increases the strength of the hardboard, but also reduces the rate of moisture absorption and improves the abrasion resistance approximately 7 times. WELDWOOD TEMPERED HARDBOARD is recommended for exterior applications such as panel siding and signs, and wherever hard usage may be expected as in flooring. It is ideal for bathrooms and basements where high or changing humidity conditions exist.

WELDWOOD BLACK TEMPERED HARDBOARD is WELDWOOD TEMPERED HARDBOARD to which a black dye is added at the time of manufacture.

WELDWOOD WALLTUF HARDBOARD is less dense than WELDWOOD STANDARD HARDBOARD but similar in other characteristics. It is recommended for interior surfaces where the strength and hardness of WELDWOOD STANDARD HARDBOARD are not required and where its particular properties make it preferable.

WELDWOOD UNDERLAYMENT is similar to ¼" WELDWOOD WALLTUF HARDBOARD but is planed on the screen side for more uniform caliper. It provides a smooth, flat surface over wood floors or wood sub-floors for linoleum, cork tile, rubber tile, asphalt tile and for carpeting.

WELDWOOD HARDBOARD EXTERIOR SIDING is specially tempered and fabricated for use as lap siding. It possesses all the advantageous characteristics of WELDWOOD TEMPERED HARDBOARD for exterior use. Exceptionally strong, it has a hard, grainless surface that will hold a painted finish for a maximum period of time.

WELDWOOD TEMPERED DEKALUX is also smooth on both sides and has been impregnated with a special tempering compound polymerized by baking. This process darkens the color slightly, increases the strength and abrasion resistance and decreases the rate of moisture absorption of the panel. WELDWOOD TEMPERED DEKALUX is recommended for both interior and exterior applications where a panel that is smooth on both sides is needed.

WELDWOOD STANDARD DEKALUX is also available for interior applications where a smooth-2-sides hardboard of this type is required.

WELDWOOD DEKATILE is a tempered hardboard with a low rate of water absorption. Score lines are impressed into the surface, forming 4-inch squares. For bathroom and kitchen walls.

WELDWOOD DEKALEATHER is a tempered hardboard with one side embossed to simulate Spanish-grain leather. Distinctive tone-on-tone effects may be obtained by various finishing methods. Used in offices, lounges, etc.

WELDWOOD DEKAPLY is a low-density laminated hardboard for use as cupboard door stock —and as a strong, sturdy core material. It is of 2 and 3-ply construction in ½" and ¾" thicknesses. Panel size: 4' x 8' only.

PRIMECOATED WELDWOOD HARDBOARD is available in the Standard, Tempered and Walltuf grades in the popular thicknesses. Equivalent to 2 coats, this factory-sprayed prime coating provides a beautifully smooth, even surface—the perfect base for all types of finishes.

WELDWOOD DEKADOOR consists of ⅛" hardboard door skins for use in the manufacture of hardboard flush doors. Available in carload quantities of 28,000 ft. minimum, ⅛" basis, to industrials only.

WELDWOOD LAMINATED HARDBOARD is available on special order, using any type of hardboard in stock.

WELDWOOD STANDARD HARDBOARD

THICKNESS	PANEL SIZE
1/10"	4' x 12'
1/8"	4' x 16'—4' x 1'
3/16"	4' x 16'—4' x 1'
1/4"	4' x 16'—4' x 1'
5/16"	4' x 12'—4' x 1'

WELDWOOD WALLTUF HARDBOARD

3/16"	4' x 16'—4' x 8'
1/4"	4' x 16'—4' x 8'

WELDWOOD UNDERLAYMENT

1/4"	4' x 4'—4' x 3'

WELDWOOD TEMPERED HARDBOARD

1/10"	4' x 12'
1/8"	4' x 16'—4' x 1'
3/16"	4' x 16'—4' x 1'
1/4"	4' x 16'—4' x 1'
5/16"	4' x 12'—4' x 1'

WELDWOOD BLACK TEMPERED HARDBOARD

1/10"	4' x 12'
1/8"	4' x 12'—4' x 1'
3/16"	4' x 12'—4' x 1'
1/4"	4' x 12'—4' x 1'

WELDWOOD TEMPERED DEKALUX

1/8"	5' x 16'—4' x 3'
3/16"	5' x 16'—5' x 5'
	4' x 16'—4' x 3'
1/4"	5' x 16'—5' x 1'
	4' x 16'—4' x 1'

WELDWOOD DEKATILE

1/8"	4' x 16'—4' x 3'

WELDWOOD DEKALEATHER

1/8"	4' x 16'—4' x 3'

WELDWOOD HARDBOARD EXTERIOR SIDING

1/4"	12" x 8'—24" x 192"
5/16"	12" x 8'—24" x 192"

WELDWOOD PRIMECOATED HARDBOARD

Standard-grade

1/8"

4' x 8'.....4' x 12'

Tempered-grade

1/8", 3/16" and 1/4"

4' x 8'.....4' x 12'

Walltuf-grade

1/4"


4' x 8'.....4' x 12'

Prices on Request

perforated hardboard, lumber and core stock



There's no limit to the uses of WELDWOOD Perforated Hardboard. Here it forms an unusual wall in the playroom of the Syosset Manor houses.

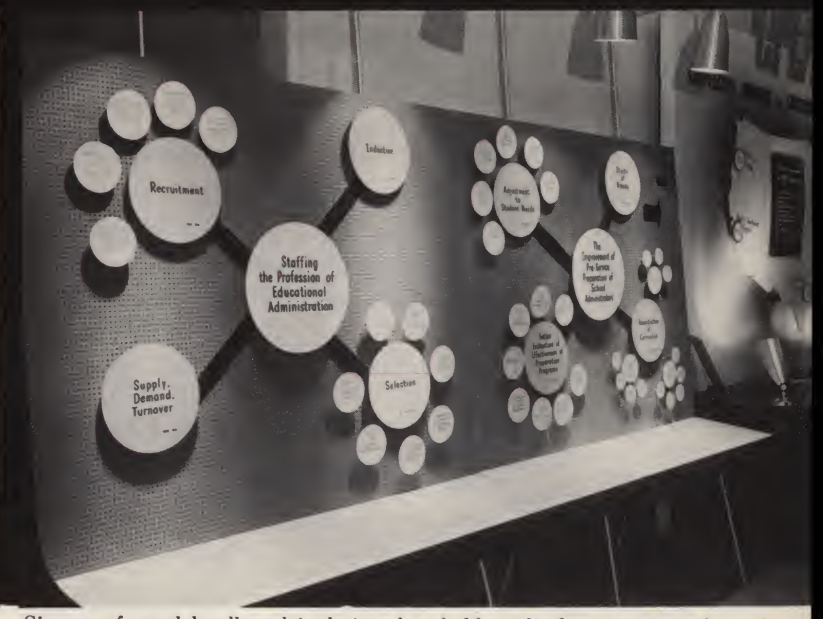

Since perforated hardboard is designed to hold or display a variety of articles, it is the ideal background for use in constructing displays and exhibits.

Perforated Hardboard paneling is both decorative and functional. It is designed to hold or display an infinite variety of items, and permits quick changes without costly repair and refinishing. The paneling accommodates standard hardware, eliminates the need for nails, screws or tools of any kind.

WELDWOOD PERFORATED HARDBOARD is made in panel sizes, 4′ x 1′ to 4′ x 8′, in three thicknesses: 1/8″, 3/16″ and 1/4″. Panels of 1/8″ and 3/16″ thickness are perforated with 3/16″ holes on 1″ or 1/2″ straight centers, 1/4″ thick panels have 9/32″ holes on 1″ straight centers.

WELDWOOD PERFORATED HARDBOARD comes in both Standard and Tempered grades. Special size panels can be perforated.



Lumber

We are currently producing large quantities of West Coast Lumber at 4 company-owned and operated sawmills. These mills are located in Shasta County, California, Seattle, Washington, Roseburg, Oregon, and Mapleton, Oregon.

Our facilities include dry kilns, planing equipment and manufacturing machinery, enabling us to provide a complete lumber service.

We can offer a very complete and diversified lumber line in the following species: Ponderosa Pine, Sugar Pine, White Fir, Douglas Fir, Spruce, Hemlock. Inquiries are solicited *for carload lots only*. Please consult our nearest warehouse.

Weldwood Core Stock

There is a fine selection of WELDWOOD core materials suitable for use with wood veneers and plastic faces. Available in a variety of panel sizes and thicknesses including: Novoply, Samara, Rotary Philippine Mahogany and Cottonwood. For information on sizes and prices, consult your local WELDWOOD branch.

Weldwood FIRE DOOR

WELDWOOD Fire Doors are recommended for installation where the rich beauty of real wood-faced doors is desired and absolute fire protection is essential.

The Fire Door is made with an incombustible mineral core material called WELDROK. It is DIMENSIONALLY STABLE and LIGHTER in weight than other fire doors. Its high insulating value is an important feature in preventing fires from spreading to the other side of the door. In a fire test, the exposed side of this door was subjected to 1700°F. At a distance of one foot from the other side of the door, the highest temperature registered was only 102°F. This means FULL PROTECTION against loss of life and property.

The original cost of a WELDWOOD Fire Door is moderate and the maintenance cost is negligible. The WELDWOOD Fire Door bears the Underwriters' Laboratories label for class "B" and "C" openings.

WELDWOOD Fire Doors are manufactured in 1¾" thickness in sizes up to and including 4' x 7'. Face veneers available include birch, Korina, mahogany, rift oak, walnut and other fine hardwoods. Only 10" x 10" or 8" x 12" vision panel-frame can be provided.



United States Plywood Corporation *unconditionally guarantees* the Weldwood "Stay-Strate" Door and the Weldwood Fire Door against warping, twisting or manufacturing defects for the LIFE OF THE INSTALLATION, if properly installed. If any Weldwood "Stay-Strate" or Weldwood Fire Door should fail to meet these standards, said door will be replaced without charge, including all labor costs of hanging and refinishing.

Weldwood "STAY-STRATE" FLUSH DOOR

The WELDWOOD "Stay-Strate" Door is an ideal interior and exterior door for residences, offices, apartments, hotels, hospitals, schools and institutional uses. It is the only flush veneer door unconditionally guaranteed for the life of its installation. In addition, each door is assigned an individual registration number.

It's a proven light-weight door with a maximum degree of *dimensional stability*, *greater fire resistance* and *high insulation value*. The exceptional performance of this WELDWOOD door is due to its incombustible mineral core—called WELDROK—an inert, extremely homogenous and strong material. WELDWOOD "Stay-Strate" Doors are made with beautiful faces of oak, birch, walnut, Korina and other fine hardwoods. All veneers are "standard thickness" for superior performance. These doors are manufactured in 1¾" thickness in a wide range of sizes.

The Doors and Partition Panels described on these pages are distributed by United States Plywood Corporation. Only general descriptions of the doors and panels are shown here. Further details, including technical data, will be found in descriptive brochures, available on request.

Weldwood

STAVED LUMBER CORE FLUSH DOOR

This is the all-purpose door—*for exterior or interior use*—where the highest quality door of this type is required. The staved lumber core is constructed of pine or equal species. The narrow core pieces are laid on edge with the grain alternated in staved construction, making the door dimensionally stable. Cross bands and faces are laminated to the cores with 100% waterproof resin glue, by the hot plate process. Where preference or code requirements necessitate, this door is also available with a hardwood core of basswood, or equal species.

Available in all species in a wide range of sizes in 1⅜″, 1¾″, 2″ and 2¼″ thicknesses. Also 1⅛″ and 1¼″ stall doors.

HOLLOW-CORE FLUSH DOORS

Hollow-core doors of the best known manufacturers are in stock. These fine Hollow-core doors have proven their stability and long life through many years of use, as well as during exhaustive endurance and stability tests. There is a good variety of sizes and wood species in stock at all times. Made in both 1⅜″ and 1¾″ thicknesses, these doors have hardwood faces which can either be painted or finished natural. *For interior use only.*

Weldwood

FIR AND PINE PANEL DOORS

For low cost and good performance WELDWOOD Douglas Fir and Pine Doors continue in strong demand. They are carefully made and inspected and will fill many needs.

A wide variety of interior and exterior fir and pine panel and sash doors is available in stock designs in many of our warehouses. The Craw-Fir-Door, a new, improved one-piece overhead type garage door, is also available. We are able to offer fast service in a complete line for mill shipment.

Mengel

STABILIZED SOLID-CORE DOORS

The Mengel Stabilized Solid-Core Door, one of the most dimensionally stable wood doors on the market, is recommended for both interior and exterior use. The solid lumber core is scientifically processed to control warpage and movement. We carry a variety of sizes and woods in 1¾″ stock thickness. Doors of 1⅛″, 1⅜″ and 2¼″ thicknesses are available on order.

DOORS TO MATCH ARCHITECTURAL

Weldwood PANELING

All types of WELDWOOD Doors to match Architectural WELDWOOD Plywood are available on special order.

ALL WELDWOOD AND MENGEL SOLID-CORE DOORS ARE ALL-PURPOSE DOORS—SUITABLE FOR EXTERIOR OR INTERIOR USE.





This "Life of Installation" guarantee against warpage is on every "Stay-Strate" Door.



This metal label is fastened to the hinge stile edge of every WELDWOOD Fire Door.

WELDWOOD "Stay-Strate" Doors are frequently used with WELDWOOD Fire Doors in hospitals, schools and other public institutions.

sliding door units and partition



NOVOPLY WARDROBE SLIDING DOOR UNITS

Constructed with doors of amazing NOVOPLY (see page 8), the flattest wood panel ever developed. NOVOPLY is a 3-ply, all wood panel, consisting of 1/16" surface of wood veneer flakes, a core of medium-sized chips and another 1/16" layer of flakes. Flakes and chips are resin-impregnated and the three plies are formed and fused together under heat and pressure.

Features: Won't warp • Solid ¾" NOVOPLY • Complete pre-cut packaged unit • Precision rolling hardware installed • NOVOPLY sliding doors can be finished natural or painted equally well.

NOVOPLY SLIDING DOORS are guaranteed against warping in excess of ⅛", providing doors are properly installed and finished on both sides. Guarantee is limited to free replacement of doors, not including labor. A typical NOVOPLY wardrobe sliding door unit is shown above. The units are supplied in a complete package: NOVOPLY doors with hardware and select jambs, headers and fascias.

More than one NOVOPLY sliding door unit can be joined together to build a complete sliding storage wall. This luxury feature is available at modest cost.

All of our distributing Branches stock NOVOPLY wardrobe sliding door units. A list of these Branches is on the back page of this catalog. Please contact the nearest Branch for sizes and specifications of units stocked.

NEW, IMPROVED GLIDAWAY SLIDING DOOR UNITS

These space-saving units are prefabricated frames furnished knocked down and complete with all hardware. This hardware is the best grade available—extruded aluminum track, quiet high-pressure laminate wheels with Oilite bearings. The *single pocket, double pocket* and *wardrobe* units are designed primarily for use in 2 x 4 stud partitions.

Glidaway Door Units offer the maximum space economy, work smoothly, easily and quietly and do away with unsightly floor tracks of old-fashioned sliding doors. 1⅜" Hollow Core Doors in any of the popular species are specially adapted for use in any of the three standard units.

Weldwood

PARTITION PANELS WITH WELDROK INCOMBUSTIBLE MINERAL CORE

WELDWOOD Partition Panels provide the perfect answer for nearly every type of flush room partitioning, including fire-resistant sub-dividing partitions in fireproof buildings.

These panels are made with an inert, light-weight and strong incombustible mineral core. Like the WELDWOOD "Stay-Strate" and Fire Doors, these panels also have excellent sound reduction properties and carry the "Life of the Installation" guarantee.

WELDWOOD Partition Panels are faced with such beautiful hardwood veneers as ash, avodire, birch, elm, Korina, mahogany, oak, prima vera and walnut. Panels faced with a different wood on each side may also be obtained.

Panels are available with a face veneer grain running either the long or short way and with either standard or "fire-proofed" hardwood edge bands. They are manufactured in a "space-saving" 1¾" thickness. Long grain panels: widths, up to 4′0″; lengths, up to 8′0″. Short grain panels: widths, up to 8′0″; lengths, up to 4′0″.



Two types of WELDWOOD Partitions—walnut and select red birch—create the beautifully rich contrast that makes the Cluett Peabody showroom so distinctive. Architects: Ketchum, Gina & Sharp.

Weldwood MOVABLE PARTITIONS

The WELDWOOD Movable Partition answers the requirements for a subdividing partition with flexibility, real wood beauty, and low fire hazard. It features standard WELDWOOD Partition Panels with WELDROK mineral core and WELDWOOD "Stay-Strate" Doors.

Features: Flexibility and flush design. Beauty of real wood. Modular panel units 24″, 30″, 36″, 42″ and 48″. Interchangeable units—positive metal connectors. Accessible concealed wiring in base, post and cornice.

WELDWOOD Movable Partitions are sold by exclusive distributors and dealers throughout the country. Erection is also provided. Please contact any WELDWOOD branch office for the name of the distributor or dealer near you.



Maximum flexibility in room partitioning is only one of many features that distinguish WELDWOOD Movable Partitions. Admiral Radio & Television Corp., Chicago, Ill. Designer: Harper Richards. Distributor: Hartmann-Sanders Co.

adhesives and finishing materials



WELDWOOD PRESTO-SET GLUE A ready-to-use, fast setting white liquid glue—non-freezing. Bonds "like magic" wood, cloth, paper, leather, hardboard, etc.



WELDWOOD CONTACT CEMENT A non-staining, highly water resistant cement for bonding Micarta and other laminates, installing plywood without nailing, hardboard, leather, etc. Bonds instantly on contact; no clamps, nails or presses.



WELDWOOD GLUE Weldwood Plastic Resin Glue is a favorite both with professional and amateur woodworkers and enjoys wide sale. It is a one-part powder which mixes easily with cold water and is ready for instant use. Weldwood Glue joins wood to wood and other porous materials in a permanent bond which is unaffected by moisture, bacteria, fungus or mold; since it does not stain, it can be used for the finest woods.



FIRZITE The finishing of fir plywood and other soft woods having a pronounced SOFT spring and HARD summer growth has always presented problems.

Firzite goes a long way toward solving these problems by sealing the wood pores—killing unsightly wild grain—virtually eliminating checking and grain raising. Available in both white and clear, it makes an excellent undercoat for paint, stain or enamel. White Firzite also provides an easy and low-cost way to achieve the popular light "blond" or bleached finishes on all woods. It may be tinted with colors-in-oil for any pastel tone desired.



SATINLAC Satinlac brings out the natural beauty of the wood—hard or soft, light or dark, plywood or lumber. It is a clear, "water-white," quick-drying material especially adapted to easy brushing. While protecting the wood, it gives a fine satin finish which preserves the original grain and color of the wood. Unlike varnish, Satinlac avoids that heavy "veneer" or built-up appearance.

Counter circulars, displays and other dealer helps are available for merchandising WELDWOOD GLUE, FIRZITE, SATINLAC, WELDWOOD PRESTO-SET AND WELDWOOD CONTACT CEMENT.

USE PHENOL RESORCINOL RESIN ADHESIVE An absolutely waterproof 2-part resin adhesive. Meets all Government Specifications. Write for prices.

WELDWOOD PRESTO-SET GLUE

Tubes	$.25 and .45
Pint Jars	1.35
Pint Squeezers (Plastic)	1.75
Quart Jars	2.30
Gallon Jars	6.00

5, 10, 30 and 55-Gallon Drums.....Prices on Request.

WELDWOOD CONTACT CEMENT

Tubes	$.35	Quart Cans	$2.15
Bottles	.25 and .60	Gallon Cans	7.00
Pint Cans	1.25	Drums	Prices on Request.

WELDWOOD GLUE

Over-the-counter sizes for resale:	List Price		List Price
A-10 (1⅛ oz.)	$.15	5 lbs.	$ 3.75
B-25 (3½ oz.)	.35	10 lbs.	7.00
C-50 (8 oz.)	.65	25 lbs.	16.25
D-100 (1 lb.)	.95		

FIRZITE

	List per unit	
	Clear	White
Pints	$.80	$1.05
Quarts	1.40	1.85
Gallons	4.80	6.10
5-Gallon	4.50	5.80

SATINLAC

	List per unit		List per unit
Pints	$1.15	Gallons	$6.95
Quarts	2.05	5-Gallon	6.85

SPECIAL FIRZITE-SATINLAC INTRODUCTORY ASSORTMENTS

Assortment #1 $45.20

24 Pints (8 each) of Clear Firzite, White Firzite and Satinlac.

12 Quarts (4 each) of Clear Firzite, White Firzite and Satinlac.

—with printed matter and display material.

Assortment #2 $80.90

Same as Assortment # 1 plus 6 gallons (2 each) of Clear Firzite, White Firzite and Satinlac.

—with printed matter, display material and display panels.

weldwood product applications are Unlimited



HOME INTERIORS—Weldwood V-Plank



WALK-IN COOLERS—Armorply



AIRLINE TERMINALS—Armorply Chalkboard



BEAUTY SALONS—Micarta



OFFICE INTERIORS—Weldwood Hardwoods



SCHOOL INTERIORS—Plankweld



STORE INTERIORS—Weldwood Hardwoods



GOVERNMENT BUILDING INTERIORS—
Weldwood Hardwoods



CABINET CONSTRUCTION—Novoply doors,
Micarta tops

Why Weldwood is the world's best known plywood



ADVERTISING in the largest national consumer magazines and a long list of trade publications has brought the WELDWOOD name before millions of people.



NEWSPAPER MATS supplied to the lumber dealers neatly tie-in with current consumer advertising. They let the consumer know where he can purchase WELDWOOD Plywood and other WELDWOOD products.




DEALER SALES AIDS for practically every WELDWOOD product are widely used by dealers. Printed matter, envelope stuffers, counter cards, displays, etc., put the WELDWOOD sales story over, answer important customer questions about the product and provide helpful installation data.


Weldwood Plywood Point-of-Sale Displays



















LUMBER DEALERS: For complete details on how to secure any of the counter and floor display units shown here, contact your nearest WELDWOOD branch office—or, write to United States Plywood Corporation, Sales Promotion Department, 55 W. 44th Street, New York 36.

list of currently available literature

The literature listed below may be secured in reasonable quantities by addressing the Advertising Department, Weldwood Building, New York 36, N. Y. PLEASE SPECIFY LITERATURE BY THE FORM NUMBER which precedes the title in this listing.

WELDWOOD PLYWOOD

Form No. Title and Description

593 "BEAUTIFUL WOOD FOR BEAUTIFUL HOMES"
Catalog, 20 pages, printed in full color.

1464 "DOUGLAS FIR WELDWOOD PLYWOOD"
Folder, 4 pages, printed in 3 colors.

688 "WELDWOOD PLYWOOD FOR COMMERCIAL INTERIORS"
Booklet, 20 pages, printed in 2 colors.

810 "QUESTIONS & ANSWERS ABOUT WELDWOOD PLYWOOD"
Booklet, 12 pages, printed in 1 color.

1453 "FOR YOUR HOME, THE LUXURY OF WELDWOOD PANELED ROOMS"
Envelope Enclosure, 6 pages, printed in full color.

1402 "WELDWOOD PLYWOOD AND ALLIED PRODUCTS"
Booklet, 8 pages, printed in 2 colors.

900 "SUGGESTED ARRANGEMENTS OF WELDWOOD PANELING"
Booklet, 20 pages, printed in 1 color.

1007 "HANDBOOK & GUIDE TO WELDWOOD PLYWOOD"
Handbook, 32 pages, printed in 1 color.

1053 "BUILDING BETTER WITH WELDWOOD PLYWOOD"
Catalog, 32 pages. printed in 2 colors.

1034 "ARCHITECTURAL GRADE WELDWOOD PLYWOOD"
Handbook, 32 pages, printed in 2 colors.

1346 "PLAN WITH WELDWOOD FIR PLYWOOD"
Folder, 24 pages, printed in 2 colors.

51-120 "ATTIC REMODELING WITH WELDWOOD DOUGLAS FIR"
Booklet, 8 pages, printed in 2 colors.

52-230 "TWO TYPES OF PLYFORM—DOUGLAS FIR PLYWOOD"
Folder, 4 pages, printed in full color.

38-90 "CONCRETE FORMS OF DOUGLAS FIR PLYWOOD"
Booklet, 16 pages, printed in 1 color.

51-50 "DESIGNS FOR PLYWOOD BUILT-INS—DOUGLAS FIR"
Booklet, 20 pages, printed in 1 color.

1251 "ONLY REAL WOOD GIVES YOU SUCH BEAUTY"
Folder, 8 pages, printed in full color.

1413 "WELDWOOD DURAPLY" Catalog, 8 pages, printed in 2 colors.

1446 "WELDWOOD WATERPROOF PLYWOOD"
Folder, 4 pages, printed in 3 colors.

1359 "WELDWOOD TEXTURE ONE-ELEVEN"
Envelope Enclosure, 4 pages, printed in full color.

54-10 "WELDWOOD TEXTURE ONE-ELEVEN"
Folder, 4 pages, printed in full color.

1391 "DO-IT-YOURSELF WITH WELDWOOD PLYWOOD"
Catalog, 40 pages, printed in 2 colors.

1461 "WELDTEX, THE STRIATED WELDWOOD PLYWOOD"
Envelope Enclosure, 6 pages, printed in 2 colors.

1288 "WELDTEX" Brochure, 16 pages, printed in full color.

1112 "WELDTEX SQUARES" Envelope Enclosure, 6 pages, printed in 2 colors.

1412 "WELDWOOD PLANKTEX" Folder, 4 pages, printed in 2 colors.

1398 "WELDWOOD SAMARA"
Envelope Enclosure, 4 pages, printed in 2 colors.

1439 "V-PLANK WELDWOOD"
Envelope Enclosure, 6 pages, printed in full color.

1440 "V-PLANK WELDWOOD" Folder, 4 pages, printed in full color.

1338 "WELDWOOD PLANKWELD" Folder, 8 pages, printed in full color.

1339 "WELDWOOD PLANKWELD"
Envelope Enclosure, 8 pages, printed in full color.

1417 "HOW TO INSTALL PLANKWELD" Folder, 4 pages, printed in 1 color.

1236 "WELDWOOD SQUARES"
Envelope Enclosure, 8 pages, printed in full color.

1157 "WELDWOOD CHECKERBOARD PANELS"
Folder, 4 pages, printed in 2 colors.

1325 "DO-IT-YOURSELF—KNOTTY PINE ROOM"
Folder, 6 pages, printed in full color.

1467 "SEA SWIRL & SURFWOOD"
Envelope Enclosure, 4 pages, printed in full color.

1316 "NOVOPLY" Catalog, 6 pages, printed in 3 colors.

1084 "NOVOPLY" Envelope Enclosure, 6 pages, printed in 2 colors.

1313 "HOW TO USE NOVOPLY" Catalog, 20 pages, printed in 2 colors.

1080 "PHYSICAL CHARACTERISTICS OF NOVOPLY"
Folder, 4 pages, printed in 1 color.

1432 "NOVOPLY ENGINEERING DATA" Folder, 6 pages, printed in 2 colors.

MICARTA

1011 "YOU CAN INSTALL MICARTA PANELS" Folder, printed in 1 color.

968 "MICARTA FABRICATION MANUAL" Booklet, 12 pages, printed in 1 color.

1118 "MICARTA, THE QUALITY HIGH PRESSURE LAMINATE"
Catalog, 8 pages, printed in full color.

1119 "YOURS FOR LASTING HOME BEAUTY"
Catalog, 8 pages, printed in full color.

1415 "MICARTA—TOPS THE FINEST IN FURNITURE"
Catalog, 36 pages, printed in 1 color.

1407 "SPECIFY MICARTA" Catalog, 8 pages, printed in full color.

1207 "MICARTA MARDI GRAS" Folder, 4 pages, printed in full color.

1208 "MICARTA MARDI GRAS" Envelope Enclosure, 4 pages, full color.

1166 "WESTINGHOUSE MICARTA" Envelope Enclosure, 8 pages, full color.

1425 "DO-IT-YOURSELF WITH MICARTA UNITOP"
Folder, 6 pages, printed in 1 color.

1334 "MICARTA UNITOP"
Envelope Enclosure, 6 pages, printed in full color.

SPECIALTIES

28 "KALISTRON AND FLEXWOOD" Folder, 6 pages, printed in 2 colors.

147 "FACTS ABOUT KALISTRON" Folder, 4 pages, printed in 2 colors.

1403 "WELDWOOD ARMORPLY CHALKBOARD"
Folder, 8 pages, printed in 3 colors.

1032 "ARMORPLY, MODERN MATERIAL OF IMAGINATION"
Folder, 12 pages, printed in 3 colors.

1397 "WELDWOOD MOLDINGS" Folder, 4 pages, printed in 2 colors.

846 "WELDWOOD MOLDINGS"
Envelope Enclosure, 4 pages, printed in 2 colors.

1304 "WELDWOOD HARDBOARD" Catalog, 28 pages, printed in 2 colors.

1300 "WELDWOOD PERFOBOARD"
Envelope Enclosure, 4 pages, printed in 2 colors.

1370 "WELDWOOD HARDBOARD"
Envelope Enclosure, 6 pages, printed in 2 colors.

1469 "WELDWOOD PORC-LIN-PLY"
Folder, 4 pages, printed in full color.

FINISHING MATERIALS AND ADHESIVES

806 "HOW TO FINISH WELDWOOD PLYWOOD"
Folder, 8 pages, printed in 1 color.

977 "FINISHING INSTRUCTION FOR WELDTEX"
Envelope Enclosure, 6 pages, printed in 1 color.

1122 "HOW TO FINISH NOVOPLY"
Envelope Enclosure, 6 pages, printed in 2 colors.

32 "INSTRUCTIONS FOR WOOD FINISHING WITH FIRZITE & SATINLAC"
Folder, 4 pages, printed in 2 colors.

1 "WIZARDS WITH WOOD—FIRZITE & SATINLAC"
Envelope Enclosure, 4 pages, printed in 3 colors.

52 "WELDWOOD PLASTIC RESIN GLUE"
Envelope Enclosure, 4 pages, printed in 2 colors.

53 "DIRECTIONS FOR MIXING & USING WELDWOOD GLUE"
Folder, 4 pages, printed in 1 color.

62 "WELDWOOD PRESTO-SET GLUE"
Envelope Enclosure, 4 pages, printed in 2 colors.

91B "WELDWOOD CONTACT CEMENT"
Envelope Enclosure, 4 pages, printed in 2 colors.

91A "WELDWOOD CONTACT CEMENT—FOR INSTALLING PLYWOOD"
Envelope Enclosure, 4 pages, printed in 2 colors.

93 "WELDWOOD CONTACT CEMENT—FOR BONDING PLASTIC LAMINATES"
Folder, 4 pages, printed in 2 colors.

95A "NEW WAY TO INSTALL PLYWOOD WITH WELDWOOD CONTACT CEMENT"
Folder, 6 pages, printed in 2 colors.

DOORS AND PARTITION PANELS

1406 "WELDWOOD DOORS"
Catalog, 8 pages, printed in 2 colors.

1405 "WELDWOOD PARTITION PANELS & MOVABLE PARTITIONS"
Catalog, 8 pages, printed in 2 colors.

1369 "WELDWOOD STAY-STRATE DOOR"
Envelope Enclosure, 4 pages, printed in 2 colors.

1323 "WELDWOOD BIRCH CUPBOARD DOOR PANELS"
Envelope Enclosure, 4 pages, printed in 2 colors.

— "GLIDAWAY WARDROBE SLIDING DOOR UNIT"
Folder, 4 pages, printed in 2 colors.

— "GLIDAWAY DOUBLE POCKET SLIDING DOOR UNIT"
Folder, 4 pages, printed in 2 colors.

— "GLIDAWAY SINGLE POCKET SLIDING DOOR UNIT"
Folder, 4 pages, printed in 2 colors.

TEKWOOD PRODUCTS

994 "TEKWOOD" Envelope Enclosure, 6 pages, printed in 2 colors.

1202 "TEKWOOD AND PROTEKWOOD"
Catalog, 8 pages, printed in 2 colors.

1179 "EYES TURN TO TEKWOOD"
Folder, 4 pages, printed in 2 colors.

The following trademarks are the exclusive property of United States Plywood Corporation: Weldwood*, Surfwood*, Weldtex*, Plankweld*, Protekwood*, Tekwood*, Armorply*, Korina*, Novoply*, Micarta*, Unitop, Mardi Gras*, Micartabord, Truwood*, Trugrain, Firzite*, Satinlac*, Kalistron*, Flexwood*, Presto-Set, Stay-Strate, Walltuf, Dekalux, Dekatile, Dekaleather, Duraply*, Nakora, Samara*, Weldwood Moldings*, V-Plank*, Planktex*, Sea Swirl*, Surplank, Porc-Lin-Ply, Dekaply, Weldwood Contact Cement, and Combwood*.

*Reg. T.M. also Pat'd or Pat. Pend.



UNITED STATES PLYWOOD CORPORATION

Executive Offices: Weldwood Building
55 West 44th Street, New York 36, N. Y.

Form No. 1457E—5505 Litho in U.S.A.

UNITED STATES PLYWOOD CORPORATION

World's Largest Plywood Organization

DISTRIBUTING UNITS AND SALES OFFICES

throughout the United States,
in Puerto Rico, Canada and Hawaii

Albany, N. Y.
Allentown, Pa.
Atlanta, Ga.
Augusta, Ga.**
Baltimore, Md.
Beaumont, Texas**
Birmingham, Ala.
Bloomsburg, Pa.*
Boston, Mass.
Brooklyn, N. Y.
Buffalo, N. Y.
Charlotte, N. C.
Chattanooga, Tenn.**
Chicago, Ill.
Cincinnati, Ohio
Cleveland, Ohio
Columbia, S. C.
Columbus, Ohio
Corpus Christi, Texas**
Culver City, Calif.
Cuyahoga Falls, Ohio*
Dallas, Texas
Des Moines, Iowa*
Detroit, Mich.
Dothan, Ala.**
East Hartford, Conn.
Evansville, Ind.**
Fresno, Calif.
Ft. Worth, Texas**
Glendale, Calif.
Greenville, S. C.
Grand Rapids, Mich.
Harrisburg, Pa.
High Point, N. C.
Houston, Texas
Indianapolis, Ind.
Jacksonville, Fla.
Kansas City, Kan.
Knoxville, Tenn.
Little Rock, Ark.**
Los Angeles, Calif.
Louisville, Ky.
Lubbock, Texas**
Marshfield, Wisc.*
Memphis, Tenn.
Miami, Fla.
Milwaukee, Wisc.
Nashville, Tenn.**
Newark, N. J.
New Hyde Park, N.Y.
New Orleans, La.
New York, N. Y.
Norfolk, Va.
Oakland, Calif.
Oklahoma City, Okla.
Omaha, Nebr.
Orlando, Fla.**
Peoria, Ill.*
Philadelphia, Pa.
Phoenix, Ariz.
Pittsburgh, Pa.
Portage, Wisc.*
Portland, Me.*
Portland, Oreg.
Providence, R.I.
Raleigh, N. C.
Richmond, Va.
Rochester, N. Y.
Rockford, Ill.
Sacramento, Calif.
Saginaw, Mich.
Savannah, Ga.**
St. Louis, Mo.
St. Paul, Minn.
St. Petersburg, Fla.**
Salt Lake City, Utah
San Antonio, Texas
San Diego, Calif.
San Francisco, Calif.
Santa Clara, Calif.
Seattle, Wash.
Shreveport, La.**
South Bend, Ind.*
Spokane, Wash.
Syracuse, N. Y.
Tallahassee, Fla.**
Tampa, Fla.
Toledo, Ohio
Tulsa, Okla.**
Tyler, Texas**
Washington, D.C.
West Pittston, Pa.
Witchita, Kan.**
Youngstown, Ohio

Denver, Colo.

IN CANADA

(Weldwood Plywood Limited)

London, Ontario
Montreal, Quebec
Ottawa, Ontario
Toronto, Ontario

DISTRIBUTORS

Honolulu, Hawaii: Lewers & Cooke, Ltd.
San Juan, Puerto Rico: Enrique A. Castillo, Inc.

*Sales Offices
**Sub-branches

UNITED STATES PLYWOOD CORPORATION
World's Largest Plywood Organization

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

Mike Jackson, FAIA

UNITED

Honolulu, Hawaii: Lewers & Cooke, Ltd.
San Juan, Puerto Rico: Enrique A. Castillo, Inc.

*Sales Offices
**Sub-branches

Form No. 1457E—5505 Litho in U.S.A.